

Description

The PD324 consists of four independent, high gain and internally frequency compensated operational amplifiers. It is specifically designed to operate from a single power supply. Operation from split power supply is also possible and the low power supply current drain is independent of the magnitude of the power supply voltages.

The PD324 series are compatible with industry standard 324.

The PD324 series are available in 2 Packages: DIP-14 and SOIC-14.

Feature

- Internally Frequency Compensated for Unity Gain
- Large Voltage Gain:100dB(Typical)
- Low Input Bias Current:20nA(Typical)
- Low Input Offset Voltage: 2mV(Typical)
- Low Supply Current:0.5mA(Typical)
- Wide Power Supply Voltage Range:
 - Single Supply: 3V to 18V
 - Dual Supplies: $\pm 1.5V$ to $\pm 9V$
- Input Common Mode Voltage Range Includes Ground
- Large Output Voltage Swing:0V to $V_{CC}-1.5V$
- Power Drain Suitable for Battery Operation

Application

- Battery Charger
- Cordless Telephone
- Switching Power Supply



DIP-14



SOIC-14

Figure 1. Package Types of PD324

Pin Configuration

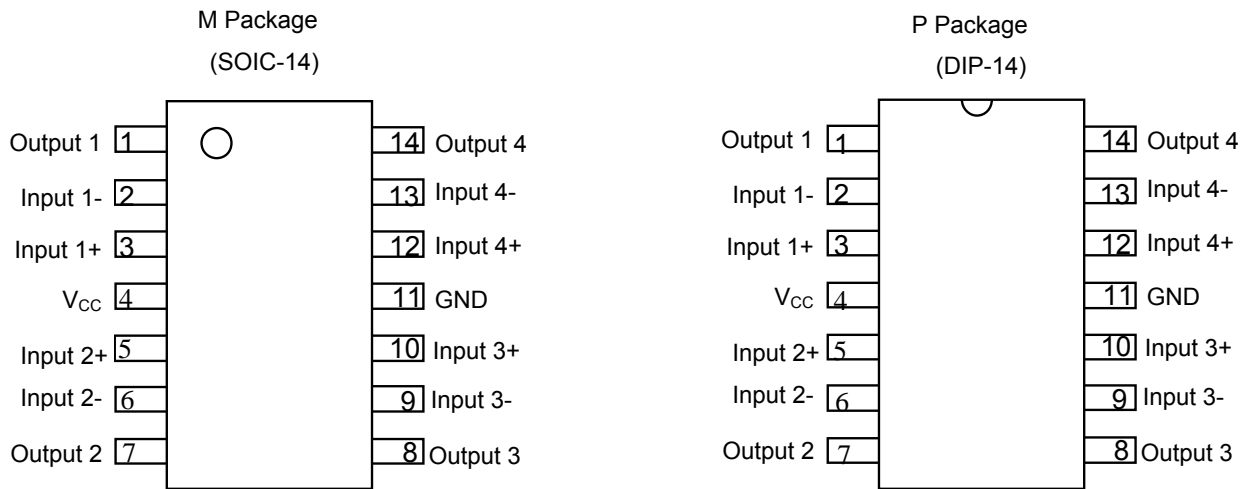


Figure 2. Pin Configuration of PD324 (Top View)

Functional Block Diagram

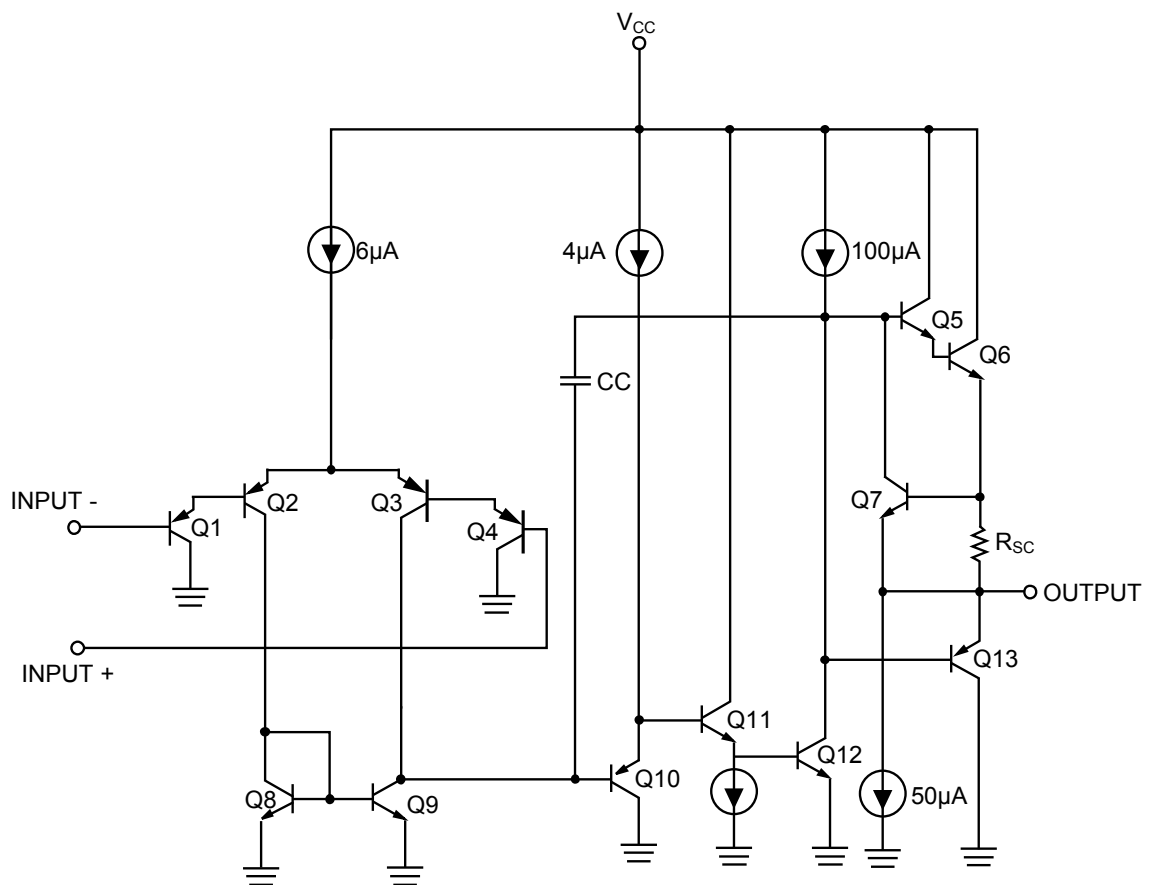


Figure 3. Functional Block Diagram of PD324 (Each Amplifier)

Absolute Maximum Ratings(Note1,)

Parameter	Symbol	Value		Unit
Power Supply Voltage	V_{CC}	20		V
Differential Input Voltage	V_{ID}	20		V
Input Voltage	V_{IC}	-0.3 to 20		V
Input Current($V_{IN} < -0.3V$)(Note 2)		50		mA
Power Dissipation($T_A = 25^\circ C$)	P_D	DIP-14	1130	mW
		SOIC-14	800	
Output Short Circuit to Ground (One Amplifier) $V_{CC} \leq 12V$ and $T_A = 25^\circ C$ (Note 3)		Continuous		
Operating Junction Temperature	T_J	150		$^\circ C$
Storage Temperature Range	T_{STG}	-65 to 150		$^\circ C$
Lead Temperature (Soldering, 10 Seconds)	T_{LEAD}	260		$^\circ C$

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device under these conditions is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: This input current will only exist when the voltage at any of the input leads is driven negative. It is due to the collector-base junction of the input PNP transistors becoming forward biased and thereby acting as input diode clamps. In addition to this diode action, there is also lateral NPN parasitic transistor action on the IC chip. This transistor action can cause the output voltages of the op amps to go to the V_{CC} voltage level (or to ground for a large overdrive) for the time duration that an input is driven negative. This is not destructive and normal output states will re-establish when the input voltage, which was negative, again returns to a value greater than $-0.3V$ (at $25^\circ C$)

Note 3: Short circuits from the output to V_{CC} can cause excessive heating and eventual destruction. When considering short circuits to ground, the maximum output current is approximately 40mA independent of the magnitude of V_{CC} . At values of supply voltage in excess of $+12V$, continuous short circuits can exceed the power dissipation ratings and cause eventual destruction. Destructive dissipation can result from simultaneous shorts on all amplifiers

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V_{CC}	3	18	V
Ambient Operating Temperature Range	T_A	-40	85	$^\circ C$

Electrical Characteristics

(Operating Conditions: $V_{CC}=5V$, $GND=0V$, $T_A=25^{\circ}C$, unless otherwise specified.)


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Input Offset Voltage	V_{IO}	$V_O=1.4V, R_S=0\Omega, V_{CC}$		2	7	mV	
Input Bias Current(Note 4)	I_{BIAS}	I_{IN+} or $I_{IN-}, V_{CM}=0V$		20	250	nA	
Input Offset Current	I_{IO}	$I_{IN+} - I_{IN-}, V_{CM}=0V$		5	50	nA	
Input Common Mode Voltage Range(Not 5)	V_{IR}	$V_{CC}=15V$	0		V_{CC} -1.5	V	
Supply Current	I_{CC}	$R_L=\infty$, Over full temperature range on all OP Amps	$V_{CC}=15V$		1	2	mA
			$V_{CC}=5V$		0.5	1.2	
Large Signal Voltage Gain	G_V	$V_{CC}=15V, R_L \geq 2K\Omega, V_O=1V$ to 11V	85	100		dB	
Common Mode Rejection Ratio	CMRR	DC, $V_{CC}=15V, V_{CM}=0V$ to $(V_{CC}-1.5)V$	65	85		dB	
Power Supply Rejection Ratio	PSRR	$V_{CC}=5V$ to 15V	65	90		dB	
Channel Separation(Note 6)	CS	$f=1KHz$ to 20KHz(Input Referred)		-120		dB	
Output Current	Source	I_{SOURCE}	$V_{IN+}=1V, V_{IN-}=0V, V_{CC}=15V, V_O=2V$	20	40		mA
	Sink	I_{SINK}	$V_{IN+}=0V, V_{IN-}=1V, V_{CC}=15V, V_O=2V$	10	18		mA
			$V_{IN+}=0V, V_{IN-}=1V, V_{CC}=15V, V_O=0.2V$	12	50		μA
Output Short Circuit to Ground	I_{SC}	$V_{CC}=15V$		45	60	mA	
Output Voltage Swing	V_{OH}	$V_{CC}=15V, R_L=2K\Omega$	12			V	
		$V_{CC}=15V, R_L=10 K\Omega$	12.5	13.5			
	V_{OL}	$V_{CC}=5V, R_L=10 K\Omega$		5	20	mV	
Thermal Resistance (Junction to Case)	θ_{JC}	DIP-14		31.79		$^{\circ}C/W$	
		SOIC-14		47.18			

Note 4: The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the input lines.

Note 5: The input common-mode voltage of either input signal voltage should not be allowed to go negatively by more than 0.3V (at 25°C). The upper end of the common-mode voltage range is $V_{CC}-1.5V$ (at 25°C), but either or both inputs can go to +18V without damages, independent of the magnitude of the V_{CC} .

Note 6: Due to proximity of external components, insure that coupling is not originating via stray capacitors between these external parts. This typically can be detected as this type of capacitance increases at higher frequencies.

Naming Rule

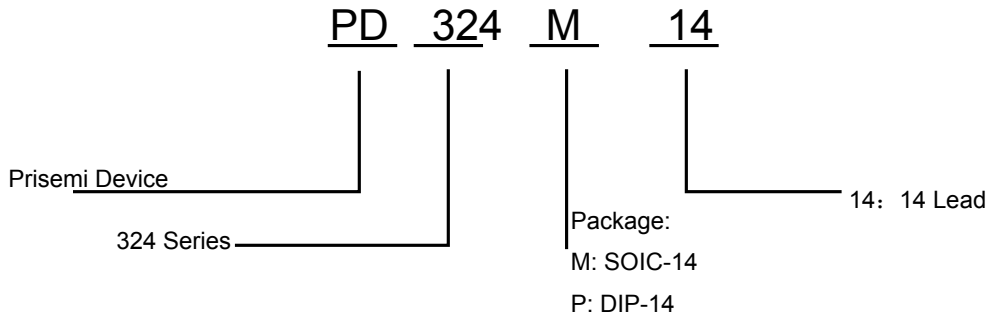

Typical Performance Characteristics

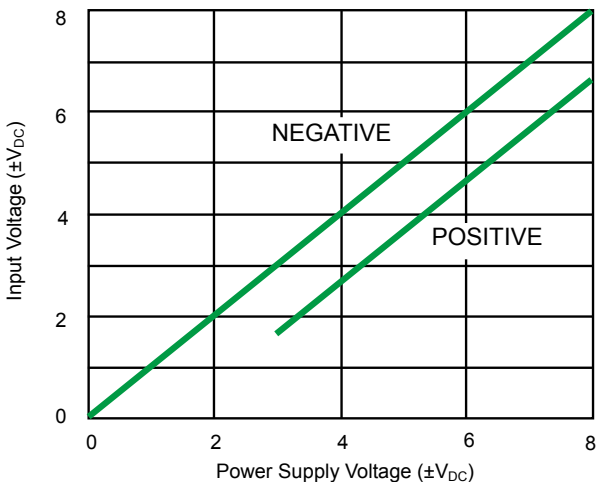


Fig 4. Input Voltage Range

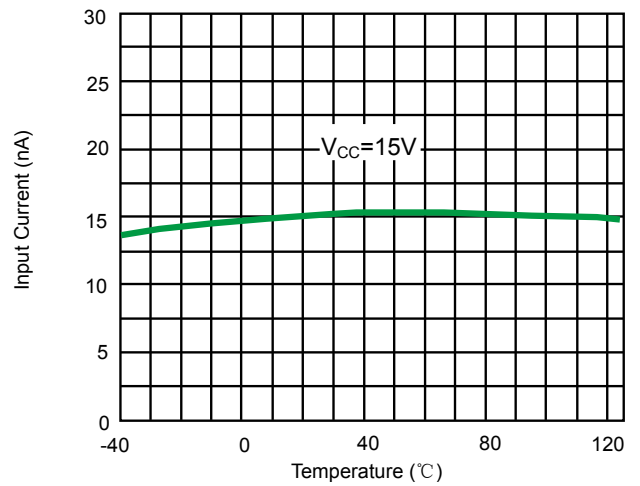


Fig 5. Input Current

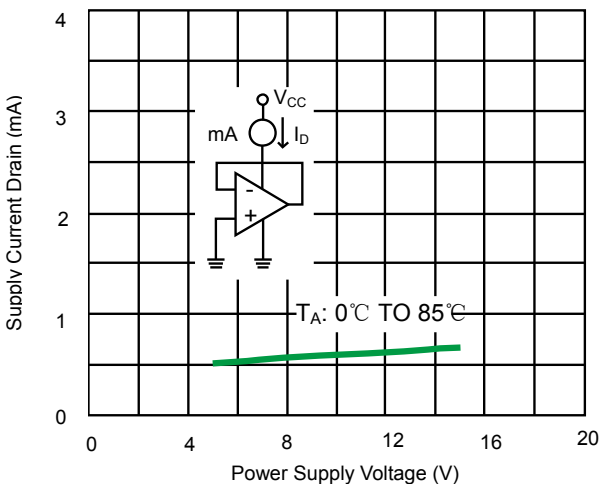


Fig 6. Supply Current

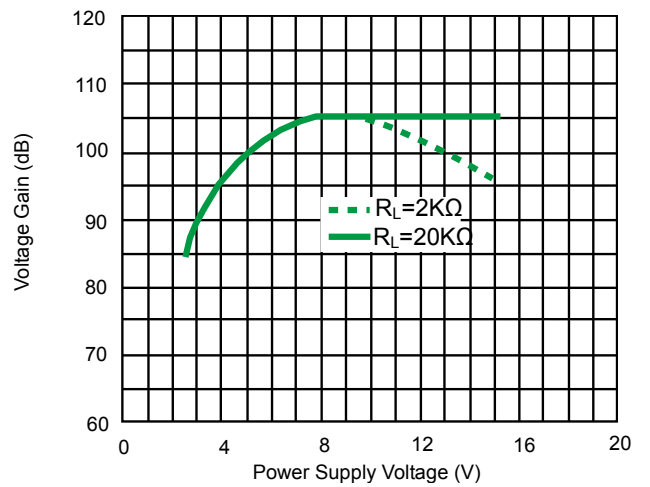


Fig 7. Voltage Gain

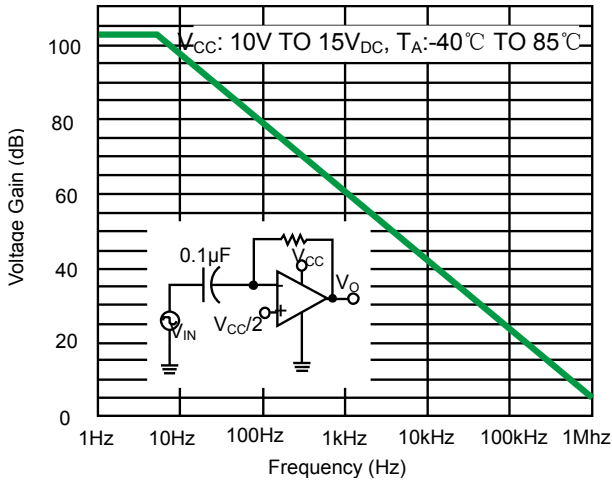


Fig 8. Open Loop Frequency Response

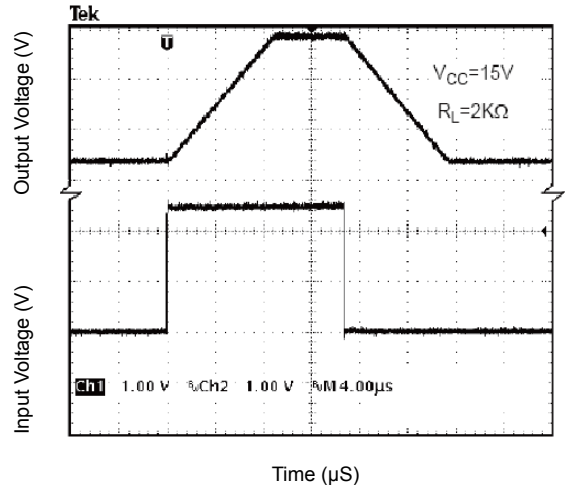


Fig 9. Voltage Follower Pulse Response

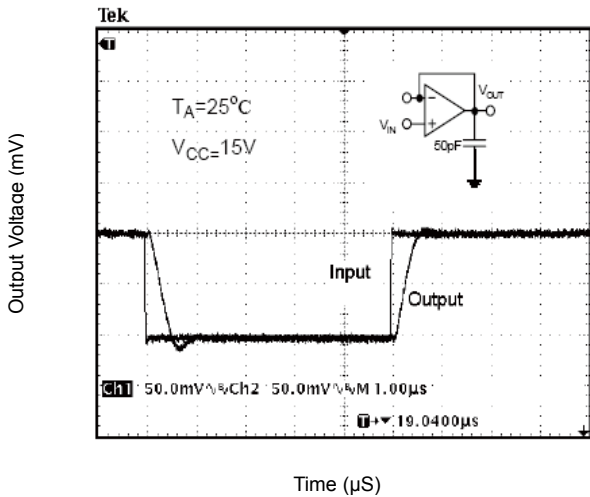


Fig 10. Voltage Follower Pulse Response (Small Signal)

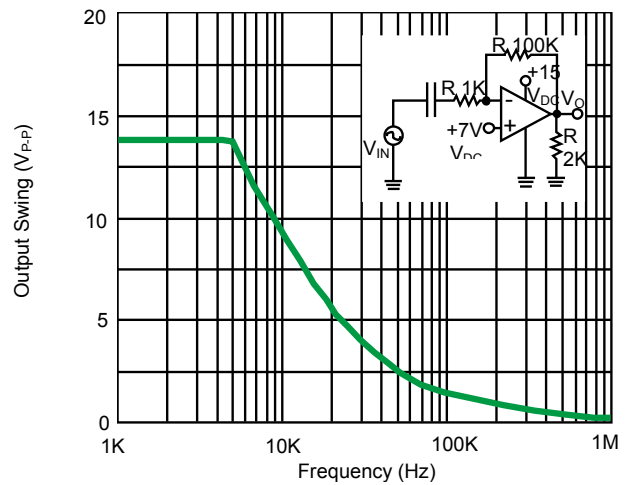


Fig 11. Large Signal Frequency Response

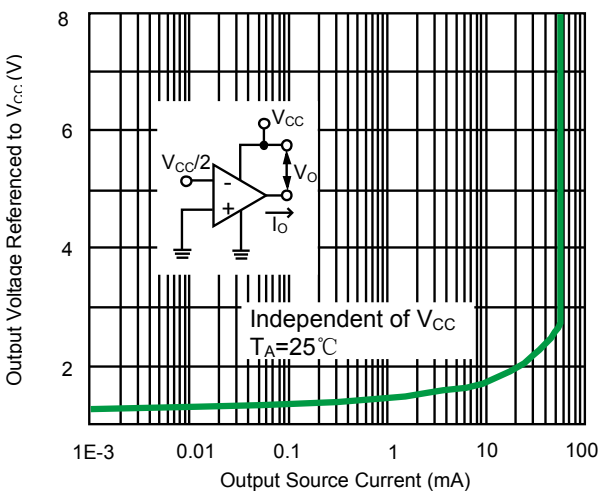


Fig 12. Output Characteristics Current Sourcing

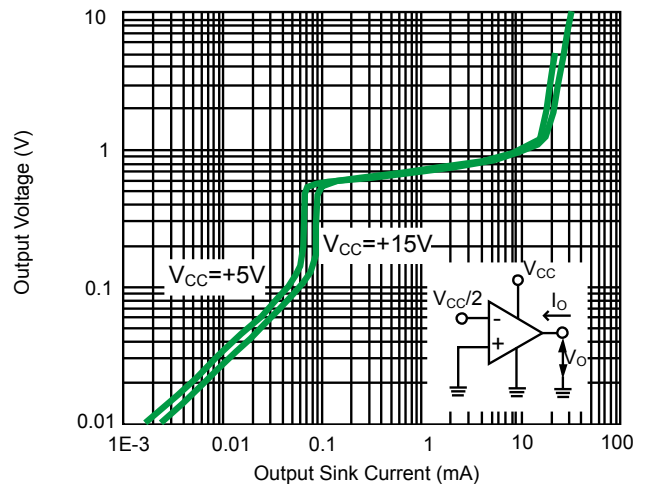


Fig 13. Output Characteristics Current Sinking

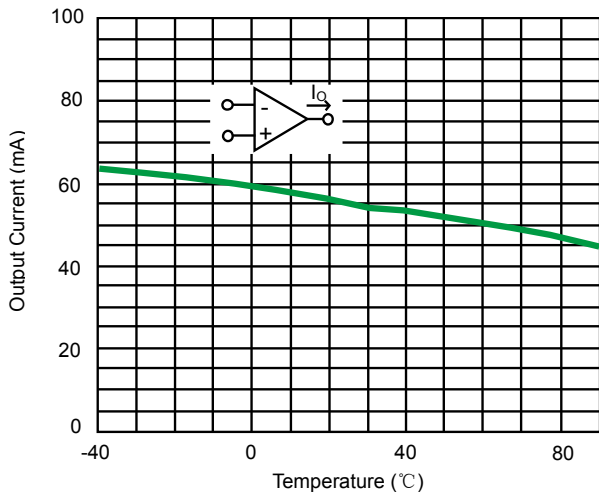


Fig 14. Current Limiting

Typical Application

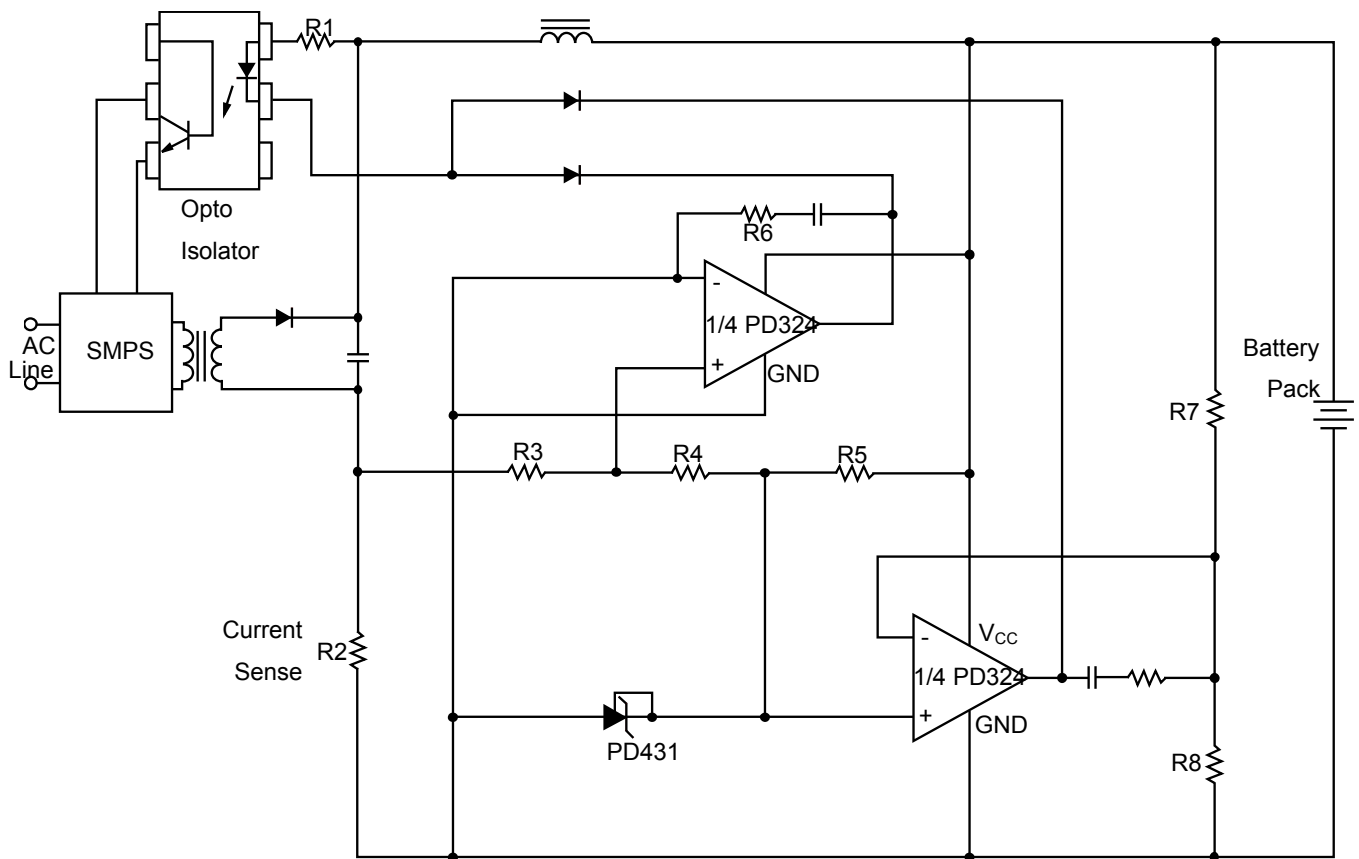


Fig 15. Battery Charger

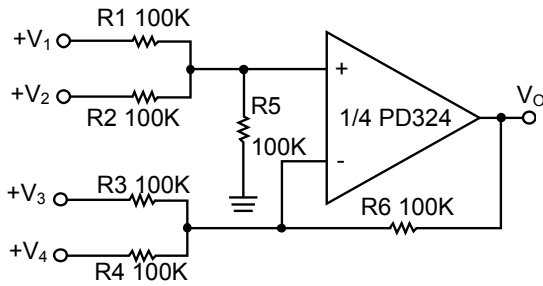


Figure 16. DC Summing Amplifier

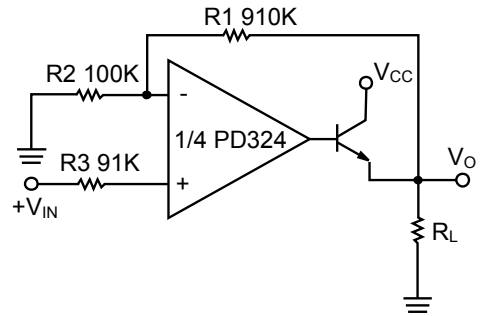


Figure 17. Power Amplifier

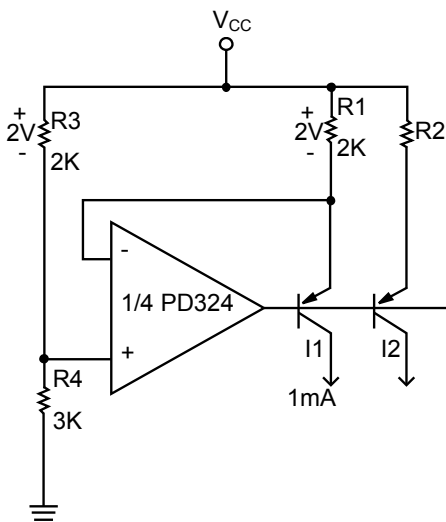


Figure 18. Fixed Current Sources

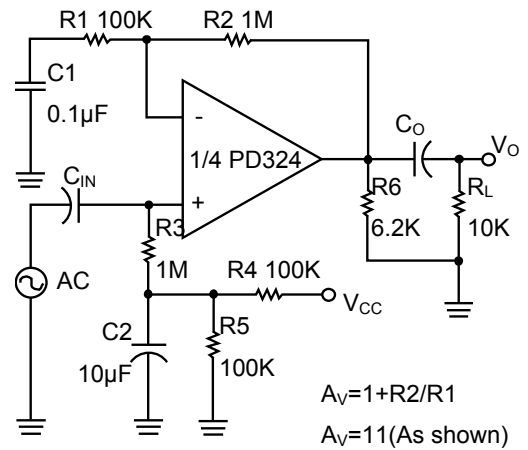


Figure 19. AC Coupled Non-Inverting Amplifier

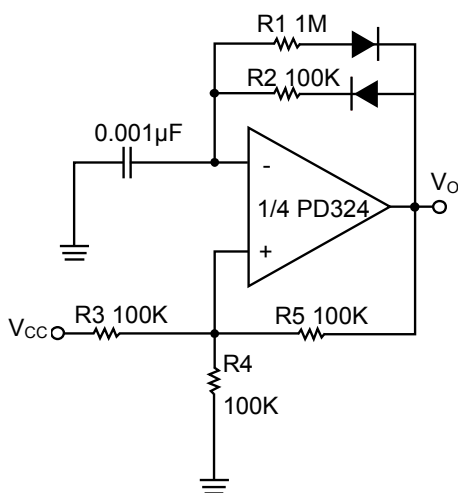


Figure 20. Pulse Generator




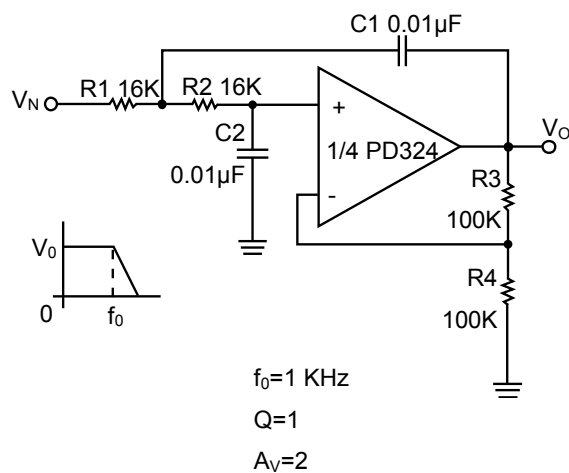


Figure 21. DC Coupled Low-Pass Active Filter


Product dimension (DIP-14)

Unit: mm (inch)

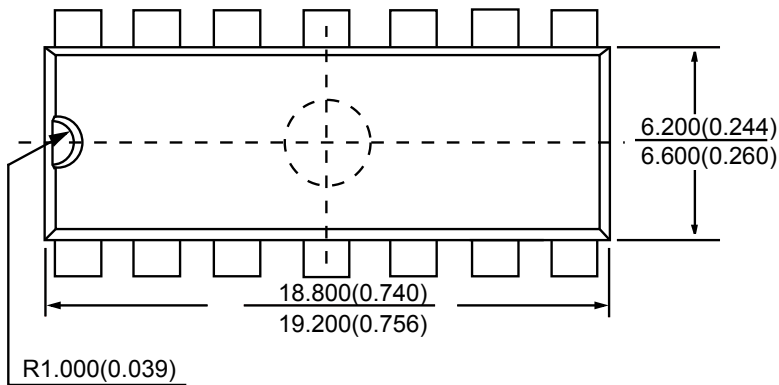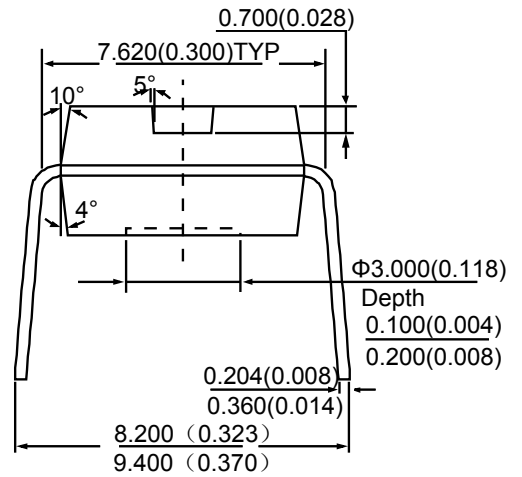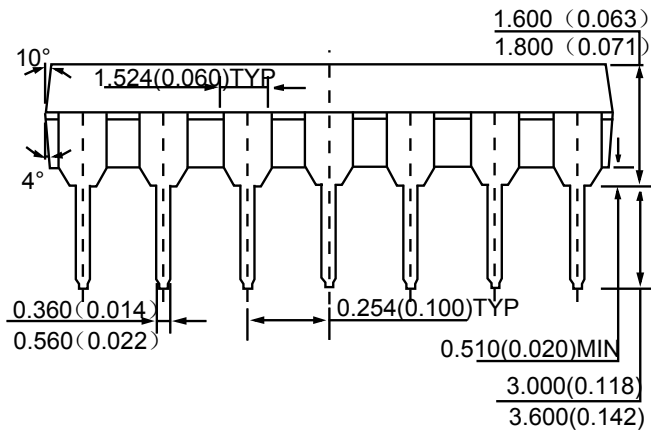


Product dimension (SOIC-14)

Unit: mm (inch)

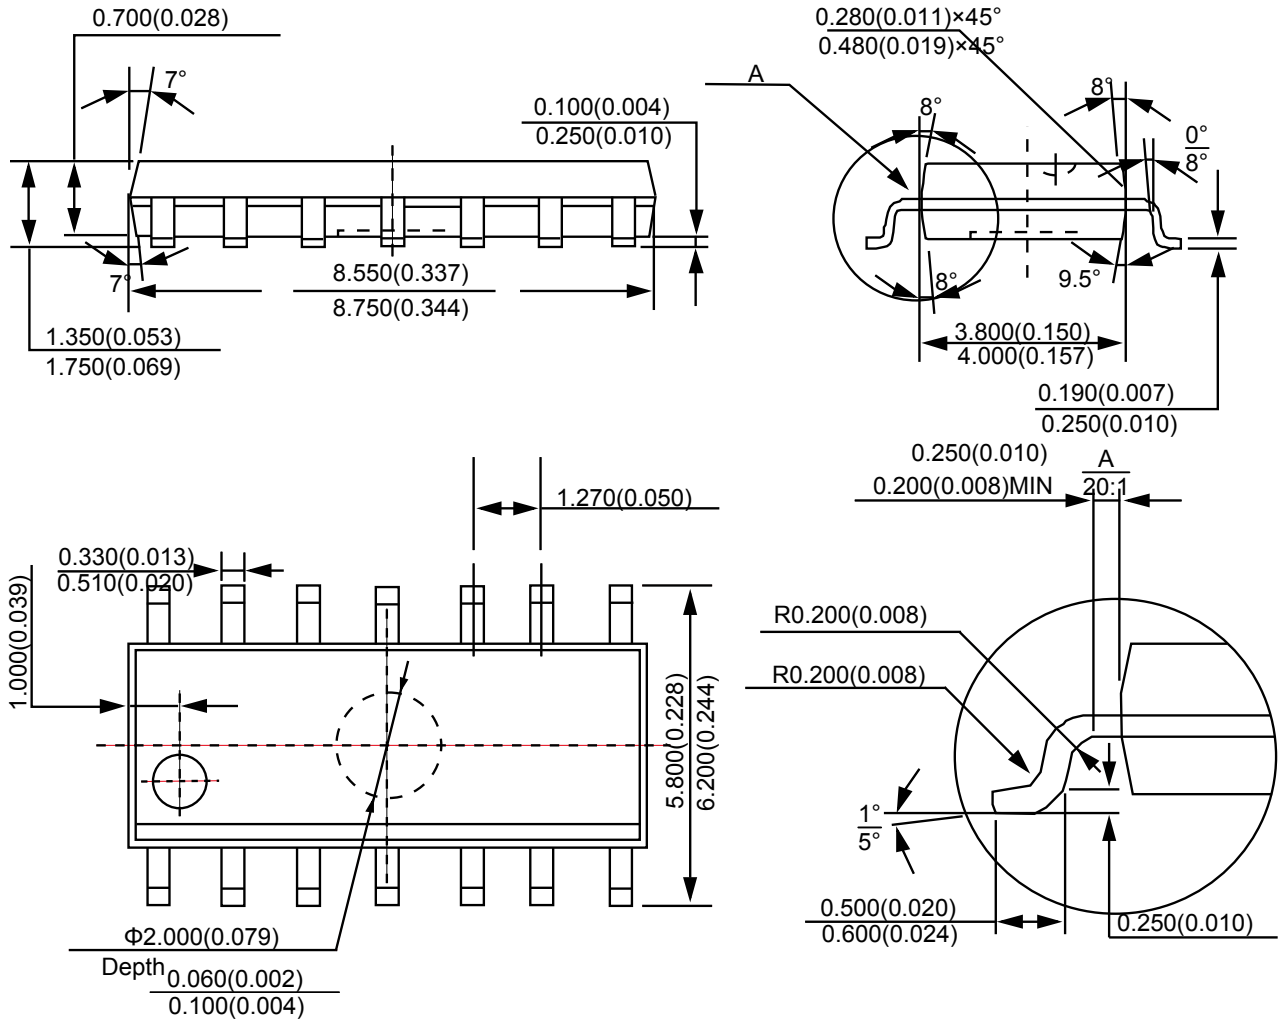

IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.