

Description

The PD2576 is a series of easy to use fixed and adjustable step-down (buck) switch-mode voltage regulators. These devices are available in fixed output voltage of 3.3V,5V,12V and adjustable output version. Both versions are capable of driving a 3A load with excellent line and load regulation.

Requiring a minimum number of external components, these regulators are simple to use and include internal frequency compensation, and a fixed-frequency oscillator.

The output voltage is guaranteed to $\pm 3\%$ tolerance under specified input voltage and output load conditions. The oscillator frequency is guaranteed to $\pm 15\%$. External shutdown is included, featuring typically 80 μA standby current. Self protection features include a two stage frequency reducing current limit for the output switch and an over temperature shutdown for complete protection under fault conditions.

The PD2576 is available in TO-220B-5L TO220-5L and TO-263-5L packages.

Feature

- 3.3V,5V,12V and adjustable output versions
- Output adjustable from 1.23V to 43V
- Fixed 52KHz frequency internal oscillator
- Guaranteed 3A output load current
- Input voltage range up to 45V
- Low power standby mode, I_Q typically 80 μA
- TTL shutdown capability
- Excellent line and load regulation
- Requires only 4 external components
- High efficiency
- Thermal shutdown and current limit protection
- Available in TO-220B/TO220 and TO-263 packages

Application

- Simple High-efficiency step-down regulator
- On-card switching regulators
- Positive to negative converter
- LCD monitor and LCD TV
- DVD recorder and PDP TV
- Battery charger
- Step-down to 3.3V for microprocessors


Package Types



TO220B-5L




TO220-5L




TO263-5L

Figure 1. Package Types of PD2576

Pin Assignments

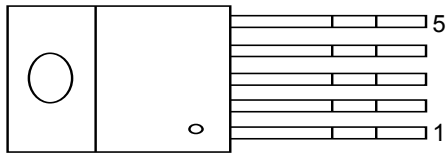

TO-220B-5L/TO-220-5L

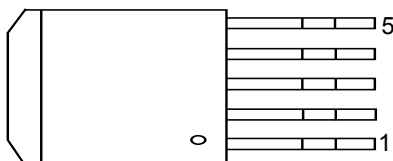

TO263-5L YY

Pin Descriptions

Pin	Name	Description
1	V _{IN}	Input supply voltage
2	Output	Switching output
3	GND	Ground
4	Feedback	Output voltage feedback
5	ON/OFF	ON/OFF shutdown Active is "Low" or floating

Output Function Control Table



Functional Block Diagram

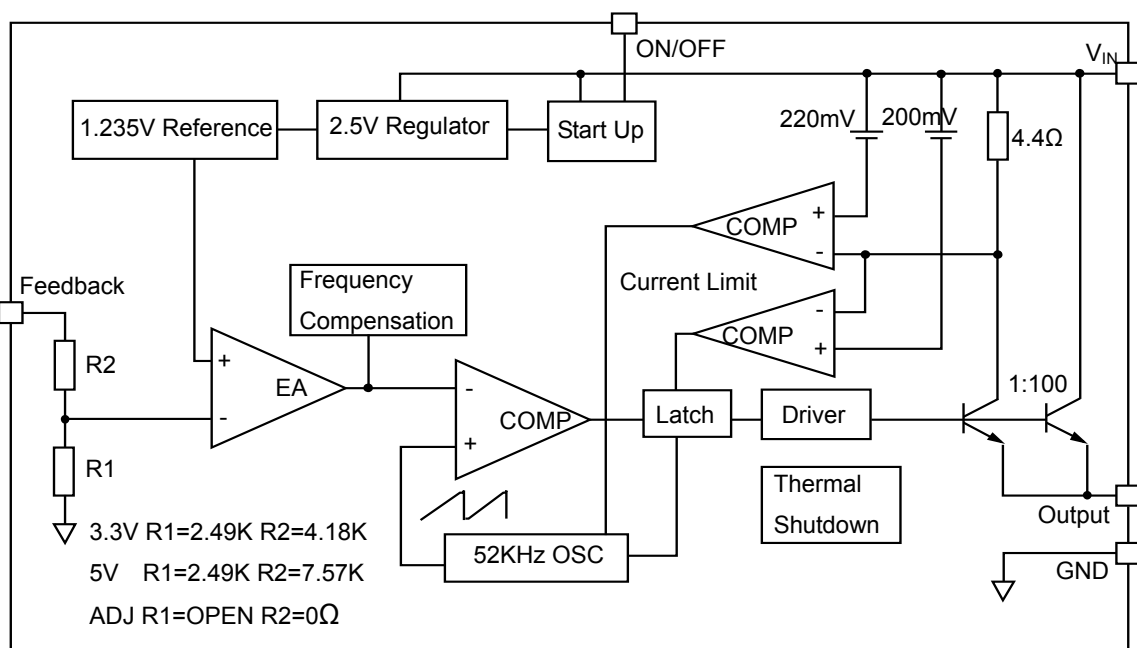


Figure 2. Functional Block Diagram of PD2576

Typical Applications

Fixed Output Voltage Version

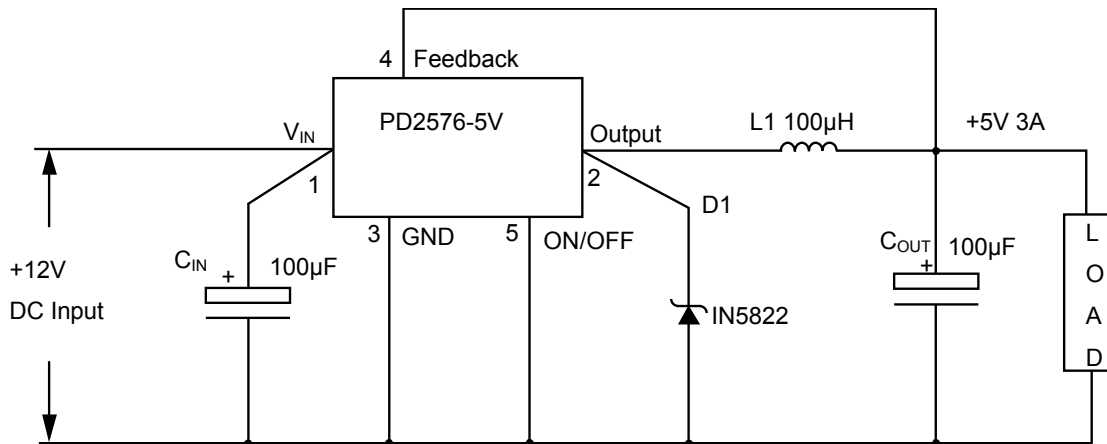


Figure 3. Typical Application of PD2576

Absolute maximum rating(Note 1)

Note1: Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Parameter	Value	Unit
Supply Voltage V_{IN}	-0.3 to 45	V
Feedback V_{FB} pin voltage	-0.3 to $V_{IN} + 0.3$	V
ON/OFF Pin voltage	-0.3 to $V_{IN} + 0.3$	V
Output pin voltage	-0.3 to $V_{IN} + 0.3$	V
Output Voltage to Ground (Steady State)	-1	V
Power Dissipation	Internally limited	W
Operating Temperature Range	-40 to +125	°C
Storage Temperature	-65 to +150	°C
Lead Temperature(Soldering,10sec)	260	°C
ESD(HBM)	2000	V
Thermal Resistance-Junction to Ambient($R_{\theta JA}$)	85	°C/W
Thermal Resistance-Junction to Case($R_{\theta JC}$)	45	°C/W

Electrical Characteristics(All Output Voltage Versions)

Unless otherwise specified, $V_{IN}=12V$ for 3.3V, 5V, adjustable version. load=0.5A, $T_a=25^{\circ}C$.

Parameter	Symbol	Conditions	Min.(Note 2)	Typ.(Note 2)	Max.(Note 2)	Unit
Feedback bias current	I_B	Adjustable only, $V_{OUT}=5V$		10	50/100	nA
Quiescent current	I_Q	$V_{FB}=12V$ force driver off		5	10	mA
Standby quiescent current	I_{STBY}	ON/OFF=5V, $V_{IN}=36V$		80	200/25	μA
Oscillator frequency	F_{OSC}		47	52	58	KHz
Saturation voltage	V_{SAT}	$I_{OUT}=3A$		1.2	1.4/1.5	V
Current Limit	I_{CL}	Peak Current($V_{FB}=0V$)		4.5	5.5/6.5	A
Output leakage current	I_L	Output=0V($V_{FB}=12V$)			50	μA
Output leakage current	I_L	Output=-1V($V_{IN}=36V$)		2	30	mA
ON/OFF pin logic input	V_{IL}	Low (Regulator ON)		1.3	0.6	V
Threshold voltage	V_{IH}	High (Regulator OFF)	2.0	1.3		V
ON/OFF pin input current	I_H	$V_{LOGIC}=2.5$ (Regulator		5	15	μA
	I_L	$V_{LOGIC}=0.5$ (Regulator ON)		0.02	5	μA
Thermal Resistance Junction to Case	θ_{JC}	TO220B-5L/TO220-5L		2.5		$^{\circ}C/W$
		TO263-5L		3.5		
Thermal Resistance Junction to Ambient (Note 3)	θ_{JC}	TO220B-5L/TO220-5L		28		$^{\circ}C/W$
		TO263-5L		23		
Vout :Output Voltage	PD2576 ADJ	$11V \leq V_{IN} \leq 45V, 0.2A \leq I_{LOAD} \leq 3A, V_{OUT}$ for 9V	1.193/1 .180	1.23	1.267/ 1.280	V
η : Efficiency		$V_{IN}=12V, V_{OUT}=9V, I_{LOAD}=3$		88		%
Vout :Output Voltage	PD2576 3.3V	$4.75V \leq V_{IN} \leq 45V, 0.2A \leq I_{LOAD} \leq 3A$	3.168/3 .135	3.3	3.432/ 3.465	V
η : Efficiency		$V_{IN}=12V, I_{LOAD}=3A$		76		%
Vout :Output Voltage	PD2576 5V	$7V \leq V_{IN} \leq 45V, 0.2A \leq I_{LOAD} \leq 3A$	4.800/4 .750	5.0	5.200/ 5.250	V
η : Efficiency		$V_{IN}=12V, I_{LOAD}=3A$		83		%

Specifications with boldface type are for full operation temperature range, the other type are for $T_J=25^{\circ}C$.

Note 2: All limits guaranteed at room temperature (standard type face) and at temperature extremes (bold type face). All room temperature limits are 100% production tested. All limits at temperature extremes are guaranteed via guaranteed via correlation using standard Statistical Quality Control (SQC) methods.

Note 3: Thermal resistance with copper area of approximately 3 in².

Typical Performance Characteristics

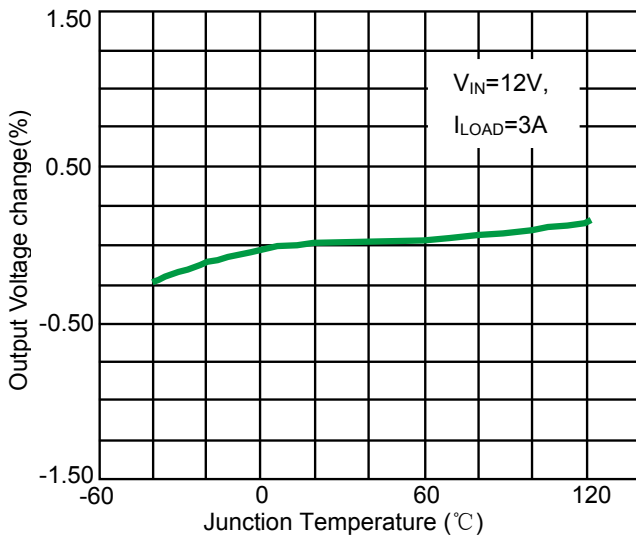


Figure 4. Output Voltage vs. Temperature

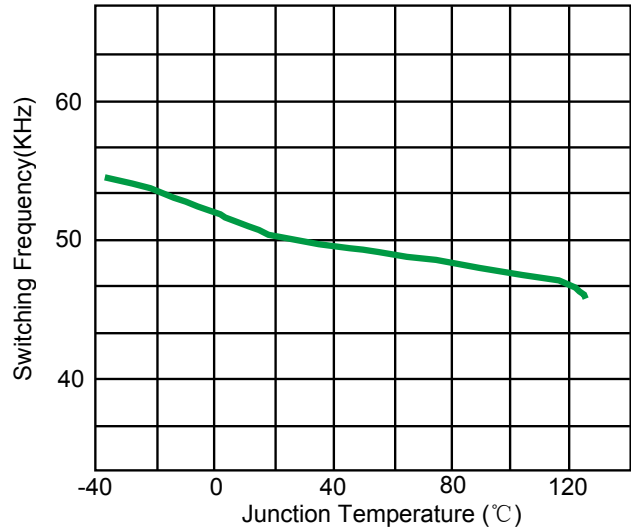


Figure 5. Switching Frequency vs. Temperature

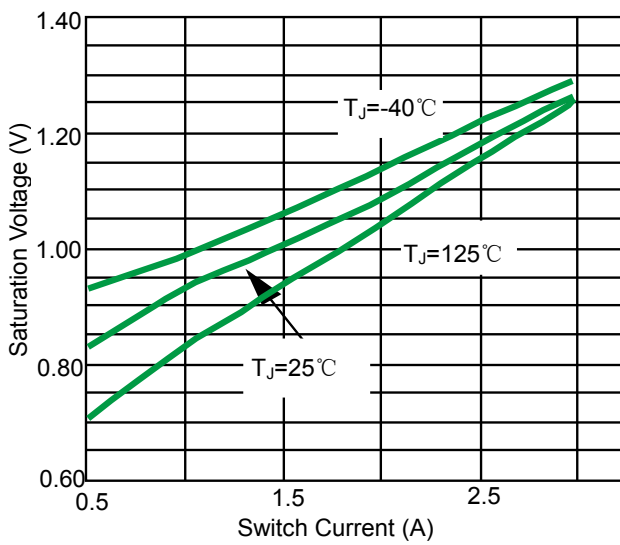


Figure 6. Output Saturation Characteristics

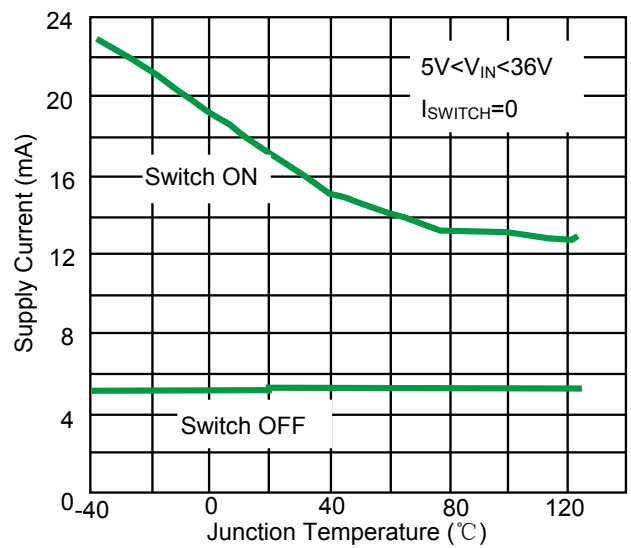


Figure 7. Quiescent Current vs. Temperature

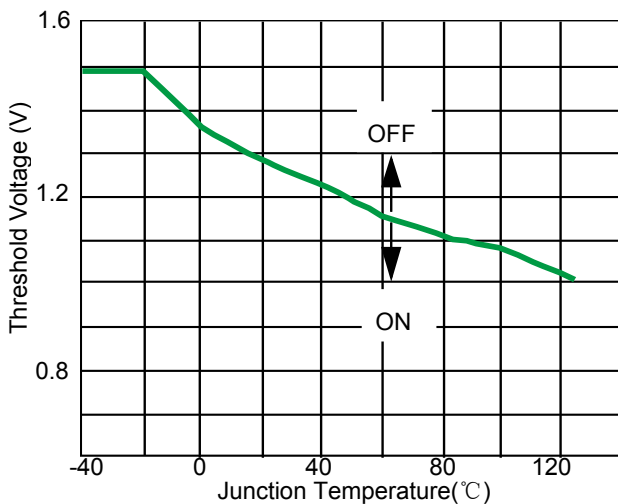


Figure 8. ON/OFF Pin Voltage

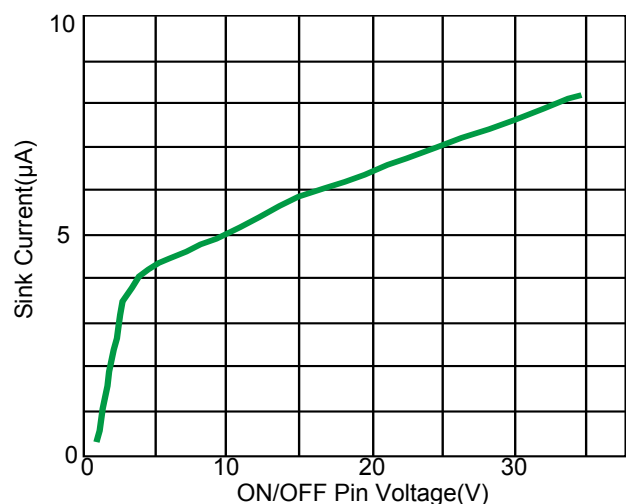


Figure 9. ON/OFF Pin Sink Current

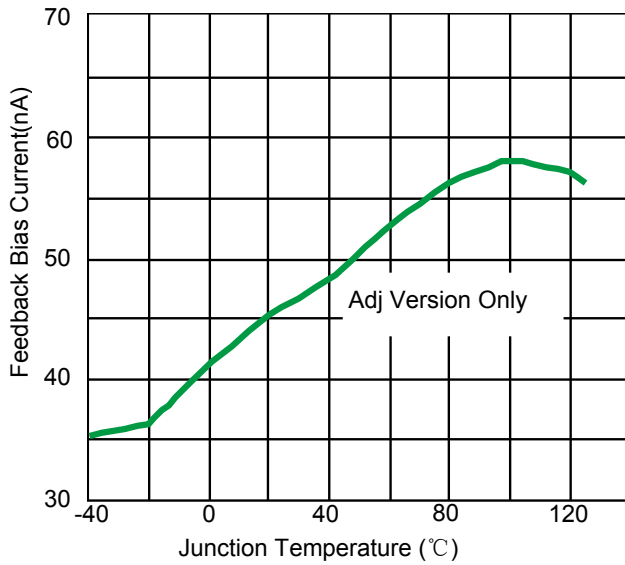


Figure 10. Output Saturation Characteristics

Typical Applications Circuit

3.3V Fixed Output Voltage Version

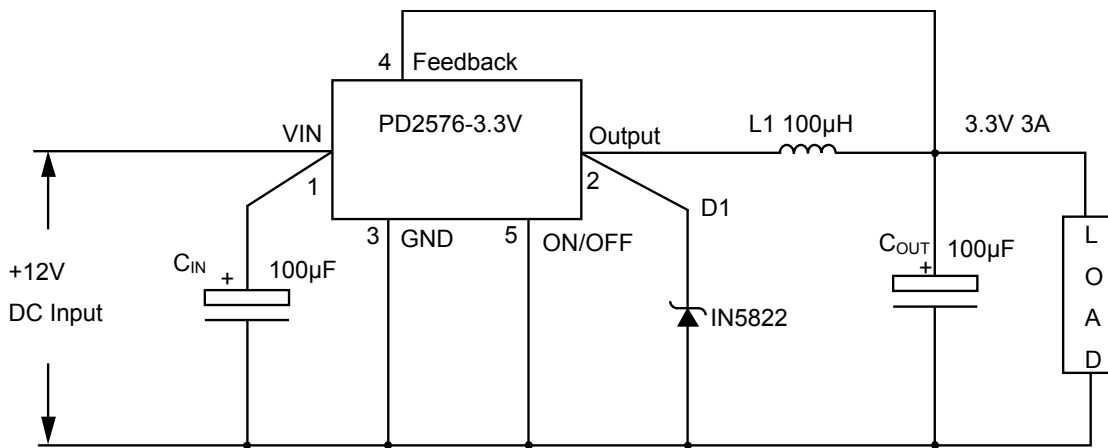


Figure 11. Typical Application of PD2576 For 3.3V

Input Voltage	Inductor	Output Capacitor(C _{OUT})	
		Through Hole Electrolytic	Surface Mount Tantalum
6V~18V	47uh	470uF/25V	330uf/6.3V
6V~45V	68uh	560uF/25V	330uf/6.3V

Table 1. PD2576 Series Buck Regulator Design Procedure for 3.3V

Typical Applications Circuit

5V Fixed Output Voltage Version

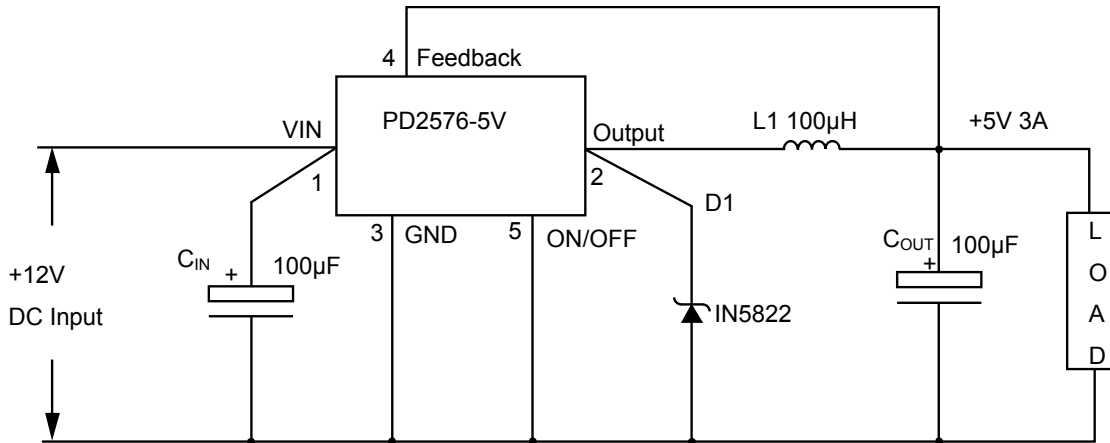



Figure 12. Typical Application of PD2576 For 5V

Input Voltage	Inductor(L1)	Output Capacitor(C _{OUT})	
		Through Hole Electrolytic	Surface Mount Tantalum
8V~18V	33uh	330uF/25V	220uf/10V
8V~45V	47uh	470uF/25V	330uf/10V

Table 2. PD2576 Series Buck Regulator Design Procedure For 5V

Typical Applications Circuit

Adjustable Output Voltage Version

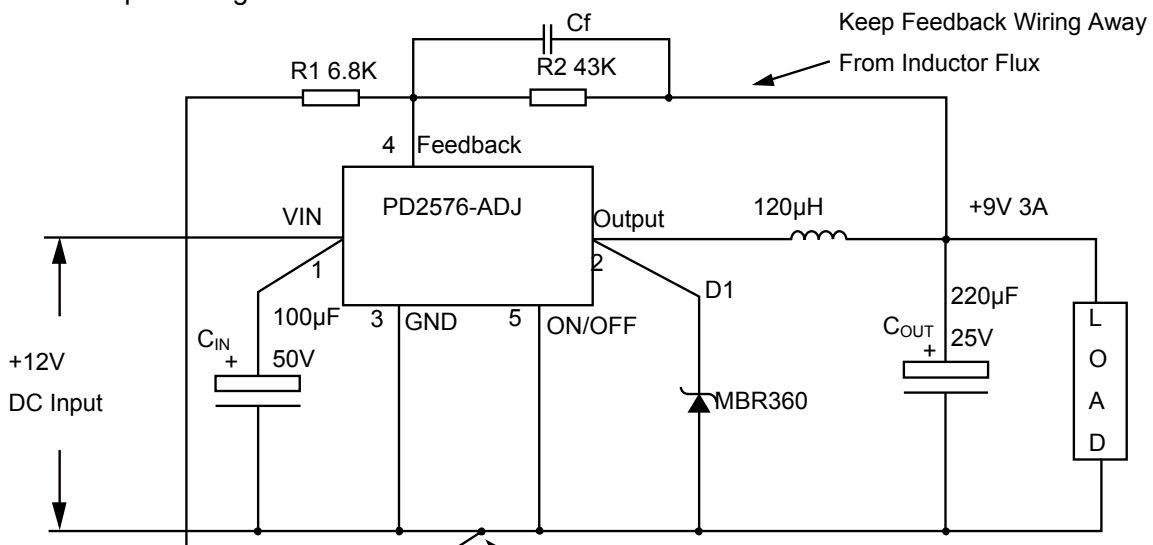

$$V_{out} = V_{ref}(1 + R2/R1) \quad (\text{Where } V_{ref} = 1.23V ; C_f = 1.5nf)$$

Figure 13. Typical Application of PD2576 For ADJ

V_{OUT}	R1	R2	Cf(Operational)
3.3V	1.6K	2.7K	33nf
5V	3.6K	11K	10nf
9V	6.8K	43K	1.5nf
12V	1.5K	13K	1nf

Table 3. PD2576 Series Buck Regulator Design Procedure For 5V

Output Voltage	Input Voltage	Inductor(L1)	Output Capacitor(C_{OUT})
			Through Hole Electrolytic
3.3V	6V~18V	47uh	470uf/25V
	6V~45V	68uh	560uf/25V
5V	8~18V	33uh	330uf/25V
	8V~45V	47uh	470uf/25V
9V	12V~18V	47uh	330uf/25V
	12V~45V	47uh	470uf/25V
12V	15V~18V	47uh	220uf/25V
	15V~45V	47uh	330uf/25V

Table 4. Typical Application Buck Regulator Design Procedure

Function Description

Pin Functions

+ V_{IN} This is the positive input supply for the IC switching regulator. A suitable input bypass capacitor must be present at this pin to minimize voltage transients and to supply the switching currents needed by the regulator

Ground Circuit ground.

Output Internal switch. The voltage at this pin switches between $(+V_{IN} - V_{SAT})$ and approximately $-0.5V$, with a duty cycle of approximately V_{OUT} / V_{IN} . To minimize coupling to sensitive circuitry, the PC board copper area connected to this pin should be kept a minimum.

Feedback Senses the regulated output voltage to complete the feedback loop.

ON/OFF Allows the switching regulator circuit to be shutdown using logic level signals thus dropping the total input supply current to approximately 80uA. Pulling this pin below a threshold voltage of approximately 1.3V turns the regulator on, and pulling this pin above 1.3V (up to a maximum of 25V) shuts the regulator down. If this shutdown feature is not needed, the ON /OFF pin can be wired to the ground pin or it can be left open, in either case the regulator will be in the ON condition.

Thermal Considerations The PD2576 is available in two packages, a 5-pin TO-220B/TO-220 and a 5-pin surface mount TO-263.

The TO-220B/TO-220 package needs a heat sink under most conditions. The size of the heat sink depends on the input voltage, the output voltage, the load current and the ambient temperature. The PD2576 junction temperature rises above ambient temperature for a 3A load and different input and output voltages. The data for these curves was taken with the PD2576 (TO-220B/TO-220 package) operating as a buck switching regulator in an ambient temperature of 25oC (still air). These temperature rise numbers are all approximate and there are many factors that can affect these temperatures. Higher

ambient temperatures require more heat sinking.

The TO-263 surface mount package tab is designed to be soldered to the copper on a printed circuit board. The copper and the board are the heat sink for this package and the other heat producing components, such as the catch diode and inductor. The PC board copper area that the package is soldered to should be at least 0.4 in², and ideally should have 2 or more square inches of 2 oz. Additional copper area improves the thermal characteristics, but with copper areas greater than approximately 6 in², only small improvements in heat dissipation are realized. If further thermal improvements are needed, double sided, multilayer PC board with large copper areas and/or airflow are recommended.

The PD2576 (TO-263 package) junction temperature rise above ambient temperature with a 3A load for various input and output voltages. This data was taken with the circuit operating as a buck switching regulator with all components mounted on a PC board to simulate the junction temperature under actual operating conditions. This curve can be used for a quick check for the approximate junction temperature for various conditions, but be aware that there are many factors that can affect the junction temperature. When load currents higher than 3A are used, double sided or multilayer PC boards with large copper areas and/or airflow might be needed, especially for high ambient temperatures and high output voltages.

For the best thermal performance, wide copper traces and generous amounts of printed circuit board copper should be used in the board layout. (Once exception to this is the output (switch) pin, which should not have large areas of copper.) Large areas of copper provide the best transfer of heat (lower thermal resistance) to the surrounding air, and moving air lowers the thermal resistance even further.

Setting the Output Voltage The output voltage is set using a resistive voltage divider from the output voltage to FB. The voltage divider divides the output voltage down by the ratio: $V_{FB} = V_{OUT} * R2 / (R1 + R2)$. Thus the output voltage is: $V_{OUT} = 1.235 * (R1 + R2) / R2$. R2 can be as high as 100KΩ, but a typical value is 10KΩ. Using that value, R1 is determined by: $R1 = 8.1 * (V_{OUT} - 1.235) (KΩ)$

The inductor is required to supply constant current to the output load while being driven by the switched input voltage. A larger value inductor results in less ripple current that in turn results in lower output ripple voltage. However, the larger value inductor has a larger physical size, higher series resistance, and/or lower saturation current. Choose an inductor that does not saturate under the worst-case load conditions. A good rule for determining the inductance is to allow the peak-to-peak ripple current in the inductor to be approximately 30% of the maximum load current. Also, make sure that the peak inductor current (the load current plus half the peak-to-peak inductor ripple current) is below the TBDA minimum current limit. The inductance value can be calculated by the equation: $L = (V_{OUT}) * (V_{IN} - V_{OUT}) / V_{IN} * f * \Delta I$. Where V_{OUT} is the output voltage, V_{IN} is the input voltage, f is the switching frequency, and ΔI is the peak-to-peak inductor ripple current.

Input Capacitor The input current to the step-down converter is discontinuous, and so a capacitor is required to supply the AC current to the step-down converter while maintaining the DC input voltage. A low ESR capacitor is required to keep the noise at the IC to a minimum. Ceramic capacitors are preferred, but tantalum or low-ESR electrolytic capacitors may also suffice. The input capacitor value should be greater than 10μF. The capacitor can be electrolytic, tantalum or ceramic. However since it absorbs the input switching current it requires an adequate ripple current rating. Its RMS current rating should be greater than approximately 1/2 of the DC load current. For insuring stable operation should be placed as close to the IC as possible. Alternately a smaller high quality ceramic 0.1μF capacitor may be placed closer to the IC and a larger capacitor placed further away. If using this technique, it is recommended that the larger capacitor be a tantalum or electrolytic type. All ceramic capacitors should be placed close to the PD2576.

Output Capacitor The output capacitor is required to maintain the DC output voltage. Low ESR capacitors are preferred to keep the output voltage ripple low. The characteristics of the output capacitor also affect the stability of the regulation control system. Ceramic, tantalum, or low ESR electrolytic capacitors are recommended. In the case of ceramic capacitors, the impedance at the switching frequency is dominated by the capacitance, and so the output voltage ripple is mostly independent of the ESR. The output voltage ripple is estimated to be: $V_{RIPPLE} \approx 1.4 * V_{IN} * (f_{LC}/f_{SW})^2$

Where V_{RIPPLE} is the output ripple voltage, V_{IN} is the input voltage, f_{LC} is the resonant frequency of the LC filter, f_{SW} is the switching frequency. In the case of tantalum or low-ESR electrolytic capacitors, the ESR dominates the impedance at the

switching

frequency, and so the output ripple is calculated as: $V_{\text{RIPPLE}} \sim \Delta I * R_{\text{ESR}}$

Where V_{RIPPLE} is the output voltage ripple, ΔI is the inductor ripple current, and R_{ESR} is the equivalent series resistance of the output capacitors.

Output Rectifier Diode The output rectifier diode supplies the current to the inductor when the high-side switch is off. To reduce losses due to the diode forward voltage and recovery times, use a Schottky rectifier. Table 1 provides the Schottky rectifier part numbers based on the maximum input voltage and current rating. Choose a rectifier whose maximum reverse voltage rating is greater than the maximum input voltage, and whose current rating is greater than the maximum load current. **Over**

Current Protection (OCP) The cycle by cycle current limit threshold is set between 4.5A and 5.5A. When the load current reaches the current limit threshold, the cycle by cycle current limit circuit turns off the high side switch immediately to terminate the current duty cycle. The inductor current stops rising. The cycle by cycle current limit protection directly limits inductor peak current. The average inductor current is also limited due to the limitation on peak inductor current. When the cycle by cycle current limit circuit is triggered, the output voltage drops as the duty cycle is decreasing.

Thermal Management and Layout Consideration In the PD2576 buck regulator circuit, high pulsing current flows through two circuit loops. The first loop starts from the input capacitors, to the V_{IN} pin, to the V_{OUT} pins, to the filter inductor, to the output capacitor and load, and then returns to the input capacitor through ground. Current flows in the first loop when the high side switch is on. The second loop starts from the inductor, to the output capacitors and load, to the GND pin of the PD2576, and to the V_{OUT} pins of the PD2576. Current flows in the second loop when the low side diode is on. In PCB layout, minimizing the two loops area reduces the noise of this circuit and improves efficiency. A ground plane is recommended to connect input capacitor, output capacitor, and GND pin of the PD2576. In the PD2576 buck regulator circuit, the two major power dissipating components are the PD2576 and output inductor. The total power dissipation of converter circuit can be measured by input power minus output power.

$$P_{\text{total_loss}} = V_{\text{IN}} \times I_{\text{IN}} - V_{\text{O}} \times I_{\text{O}}$$

The power dissipation of inductor can be approximately calculated by output current and DCR of inductor.


$$P_{\text{inductor_loss}} = I_{\text{O}}^2 \times R_{\text{inductor}} \times 1.1$$

The junction to ambient temperature can be got from power dissipation in the PD2576 and thermal impedance from junction to ambient.

$$T_{\text{(jun-amb)}} = (P_{\text{totalloss}} - P_{\text{inductorloss}}) \times \Theta_{\text{JA}}$$


The maximum junction temperature of PD2576 is 145°C, which limits the maximum load current capability. Please see the thermal de-rating curves for the maximum load current of the PD2576 under different ambient temperatures. The thermal performance of the PD2576 is strongly affected by the PCB layout. Extra care should be taken by users during the design process to insure that the IC will operate under the recommended environmental conditions. Several layout tips are listed below for the best electric and thermal performance. 1. Do not use thermal relief connection to the V_{IN} and the GND pin. Pour a maximized copper area to the GND pin and the V_{IN} pin to help thermal dissipation. 2. Input capacitor should be connected to the V_{IN} pin and the GND pin as close as possible. 3. Make the current trace from V_{OUT} pins to L to the GND as short as possible. 4. Pour copper plane on all unused board area and connect it to stable DC nodes, like V_{IN} , GND, or V_{OUT} . 5. Keep sensitive signal traces such as trace connecting FB pin away from the V_{OUT} pins

Product dimension (TO-220B-5L)

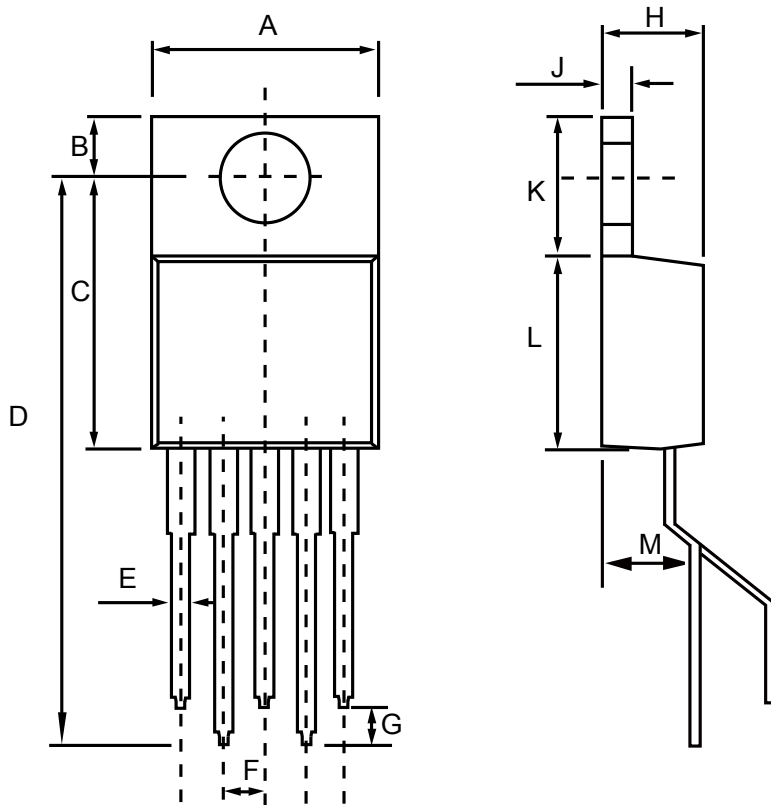


Dim	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	10.05	10.4	0.395	0.409
B	2.6	3.0	0.102	0.118
C	12.1	13.2	0.476	0.519
D	22.5 TYP.		0.885 TYP.	
E	0.80	1.05	0.031	0.041
F	1.7 TYP.		0.066 TYP.	
G	1.1 TYP.		0.043 TYP.	
H		4.8		0.188
J		1.37		0.053
K	6.0	6.6	0.236	0.259
L	8.5	9.8	0.334	0.385
M	4.5 TYP.		0.177 TYP.	

Product dimension(TO-220-5L)

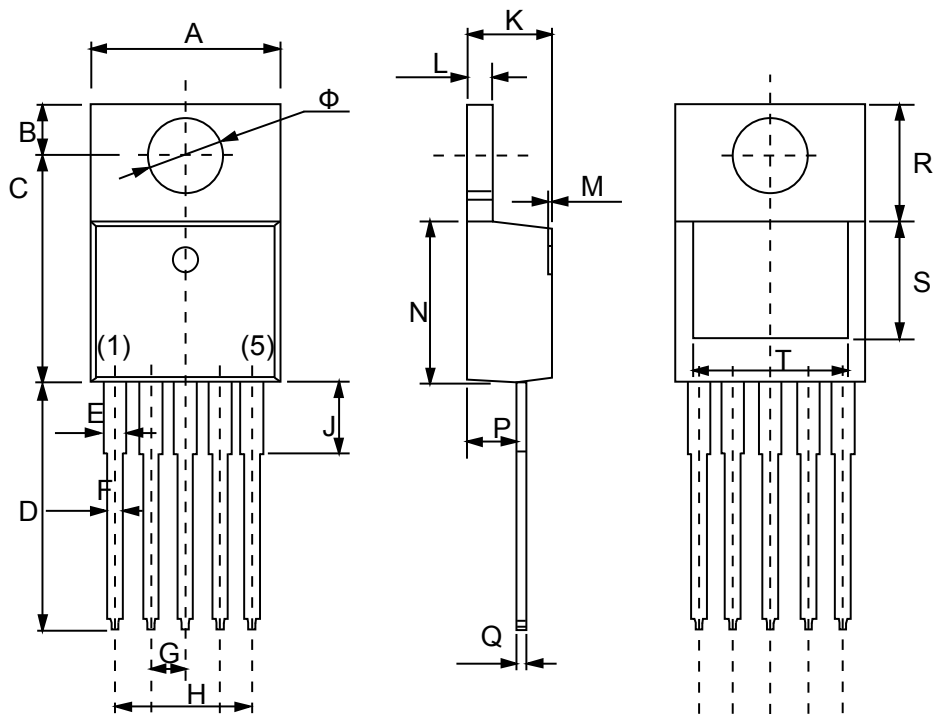


Dim	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	10.010	10.350	0.394	0.407
B	2.590	2.890	0.102	0.114
C	12.060	12.460	0.475	0.491
D	13.400	13.800	0.528	0.543
E	1.170	1.370	0.046	0.054
F	0.710	0.910	0.028	0.036
G	2.540 TYP.		0.100 TYP.	
H	4.980	5.180	0.196	0.204
J	3.560	3.960	0.140	0.156
K	4.470	4.670	0.176	0.184
L	1.200	1.400	0.047	0.055
M	0.000	0.300	0.000	0.012
N	8.500	8.900	0.335	0.350
P	2.520	2.820	0.099	0.111
Q	0.380	0.520	0.014	0.020
R	6.600 REF.		0.260 REF.	
S	6.060 REF.		0.239 REF.	
T	8.440 REF.		0.332 REF.	
Φ	3.735	3.935	0.147	0.155

Product dimension (TO263-5L)

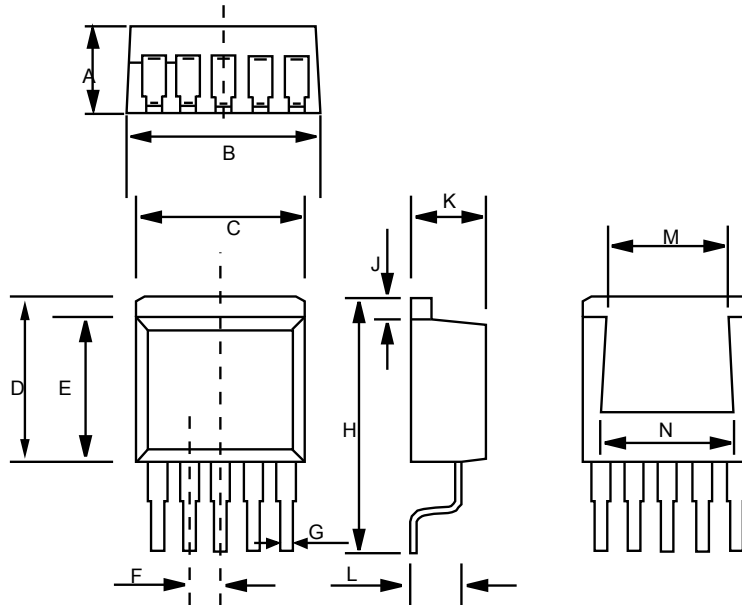

Dim	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	4.070	4.820	0.160	0.190
B	9.650	10.290	0.380	0.405
C	9.650	10.290	0.380	0.405
D	9.910	11.040	0.390	0.435
E	8.640	9.650	0.340	0.380
F	2.540		0.100	
G	0.510	0.990	0.020	0.039
H	14.760	15.740	0.581	0.620
J	1.270	1.390	0.050	0.055
K	4.070	4.820	0.160	0.190
L	3.000	3.100	0.118	0.122
M	7.420		0.292	
N	7.980		0.314	

IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi). Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.