


### Feature

This device is Pb-Free, Halogen Free/BFR Free and RoHS compliant.

- Package: SOT-523
- Emitter -Base Breakdown Voltage 5V
- High DC current gain typical 380
- Low Saturation Voltage 200mV
- 100mA continuous collector current
- PNP switch transistor



### Mechanical Characteristics

- Lead finish:100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature:260°C
- Device meets MSL 1 requirements
- Pure tin plating: 7 ~ 17 um
- Pin flatness : ≤3mil

### Electrical characteristics per line@25°C( unless otherwise specified)

Parameter	Symbol	Value	Units
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-40	V
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-50	V
Emitter -Base Breakdown Voltage	$V_{(BR)EBO}$	-5	V
Collector Current	$I_C$	-100	mA
Peak Collector Current	$I_{CM}$	-200	mA
Peak Base Current	$I_{BM}$	-100	mA
Total Dissipation @25°C	$P_{tot}$	150	mW
Storage Temperature	$T_{stg}$	-65~150	°C
Max. Operating Junction Temperature	$T_j$	150	°C
Thermal Characteristics			
Thermal Resistance From Junction to ambient( Note 1)	$R_{th j-a}$	833	K/W


#### Note

1. Transistor mounted on an FR4 printed-circuit board.

Absolute maximum rating@25°C


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Collector-Base Breakdown Voltage	$BV_{CBO}$		-50			V
Collector-Emitter Breakdown Voltage	$BV_{CEO}$		-40			V
Emitter-Base Breakdown Voltage	$BV_{EBO}$		-5			V
Collector Cut-off Current ( $I_E=0$ )	$I_{CBO}$	$V_{CB}=-30V$			-0.1	$\mu A$
Emitter Cut-off Current( $I_C=0$ )	$I_{EBO}$	$V_{EB}=-4V$			-0.1	$\mu A$
DC Current Gain	$h_{FE}$	$I_C=-1mA, V_{CE}=-6V$	200		500	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-50mA, I_B=-5mA$	-		-200	mV
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=-100mA, I_B=-10mA$			-950	mV
Transition frequency	$f_T$	$V_{CE}=-12V, I_E=-2mA, f=100MHz$	100			MHz
Output Capacitance	$C_{ob}$	$V_{CB}=-12V, I_E=0mA, f=1MHz$			2.2	pF

Solder Reflow Recommendation

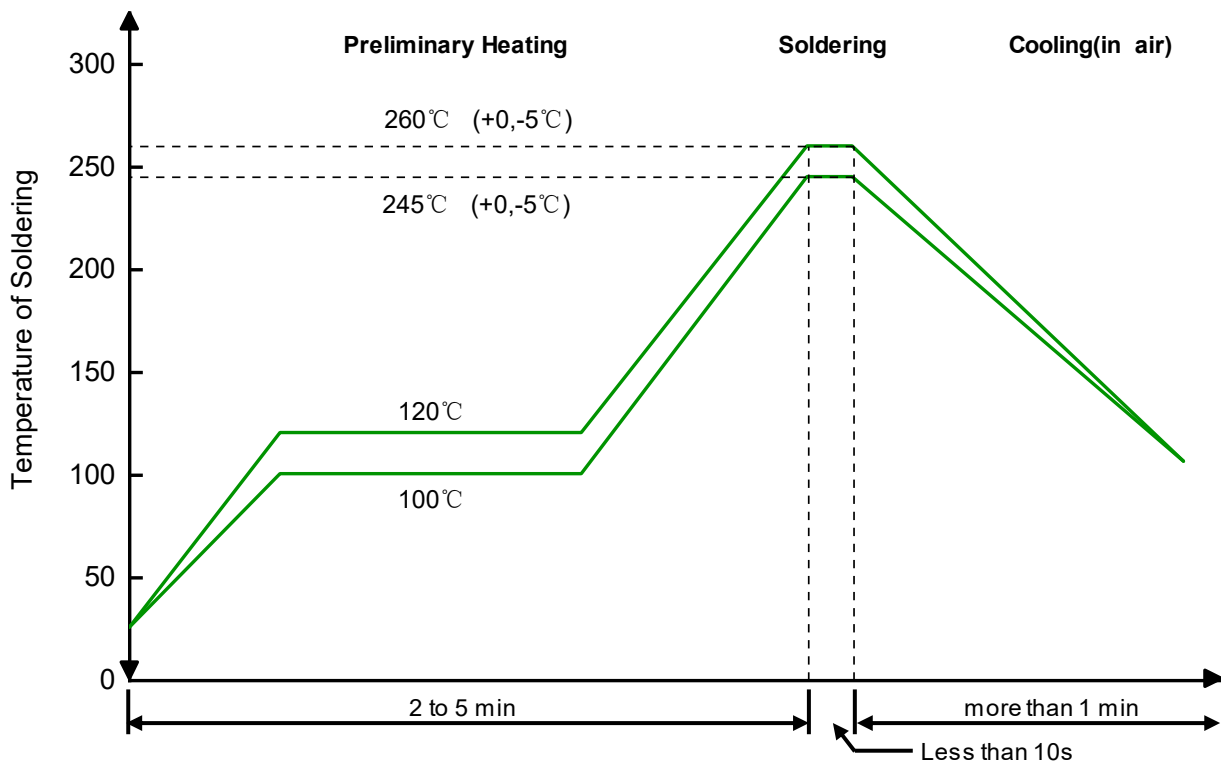


Remark: Pb free for 260°C; Pb for 245°C.

Product dimension (SOT-523)

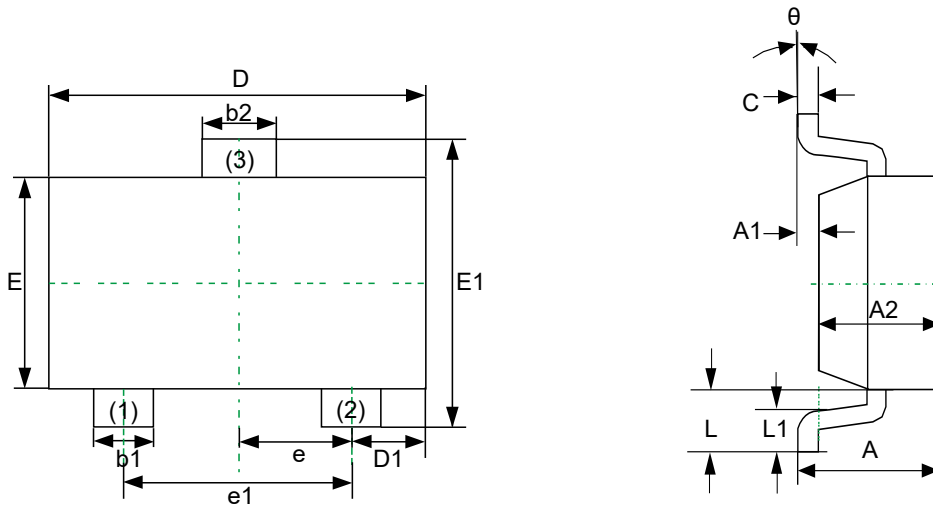

Dim	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
D1	0.300	0.500	0.012	0.020
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500TYP		0.020TYP	
e1	0.900	1.100	0.035	0.043
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
$\theta$	0°	8°	0°	8°

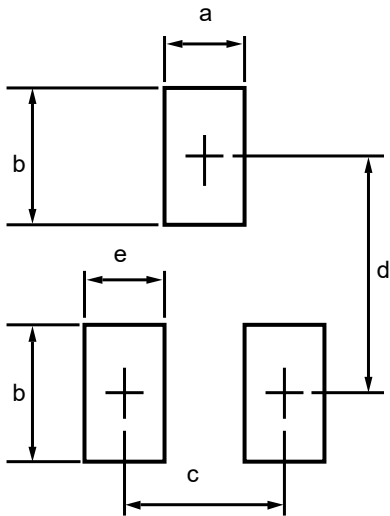


Dim	Millimeters	
	MIN	MAX
a	--	0.5
b	--	0.6
c	--	1.0
d	--	1.24
e	--	0.4

Ordering information


Device	Package	Shipping
PPT523T503E0-2	SOT-523 (Pb-Free)	3000 / Tape & Reel

Load with information

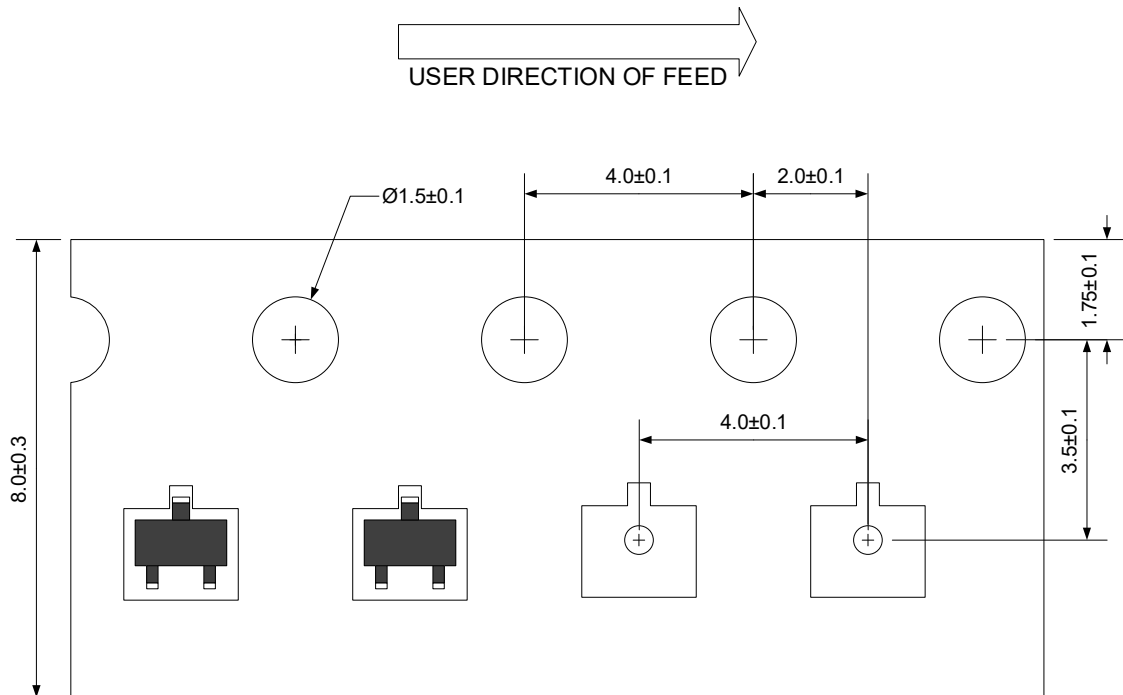

Unit:mm


**IMPORTANT NOTICE**

 and **Prisemi**<sup>®</sup> are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**<sup>®</sup> is a registered trademark of Prisemi Electronics.

All rights are reserved.