


600W Axial Leaded Transient Voltage Suppressor

Description

Protect sensitive electronics against voltage transients induced by inductive load switching and lightning. Ideal for the protection of I/O interfaces, Vcc bus, and other integrated circuits.

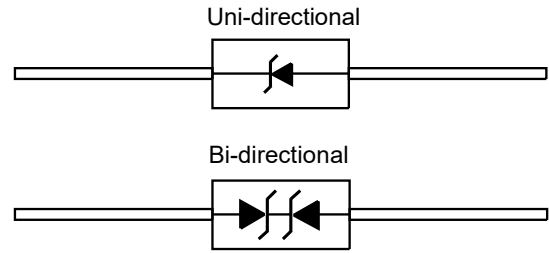

Feature

- Reverse Stand off Voltage range 5.8 to 467 V
- Uni-directional and Bi-directional
- Glass passivated junction
- Excellent clamping capability
- 100% surge tested

Absolute maximum rating@25°C

Parameter	Symbol	limits	Unit
Peak Pulse Power Dissipation at TA=25°C by 10x1000µs waveform (Fig.2)(Note 1) (Note 2)	P _{PPM}	600	W
Power Dissipation on infinite heat sink at TA=50°C	P _D	6.5	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave Unidirectional only(Note 3)	I _{FSM}	300	A
Maximum Instantaneous Forward Voltage at 100A for Unidirectional only	V _F	3.5V/5.0	V
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150	°C
Typical Thermal Resistance Junction to Lead	R _{wJL}	15	°C/W
Typical Thermal Resistance Junction to Ambient	R _{wJA}	75	°C/W

Notes:

1. Non-repetitive current pulse, per Fig.3 and derated above TA=25°C per Fig. 2.
2. Mounted on copper pad area of 0.31x0.31" (8.0 x 8.0mm) to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.

Electrical characteristics @Tamb 25°C

Part Number (Uni)	Part Number (Bi)	Reverse Stand off Voltage V_R (V)	Breakdown Voltage $V_{BR} @ I_T$ (V)		Test Current I_T (mA)	Maximum Clamping Voltage $V_C @ I_{PP}$ (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage $I_R @ V_R$ (μ A)
			MIN	MAX				
P6KE6.8A	P6KE6.8CA	5.80	6.45	7.14	10	10.5	57.14	1000
P6KE7.5A	P6KE7.5CA	6.40	7.13	7.88	10	11.3	53.10	500
P6KE8.2A	P6KE8.2CA	7.02	7.79	8.61	10	12.1	49.59	200
P6KE9.1A	P6KE9.1CA	7.78	8.65	9.50	1	13.4	44.78	50
P6KE10A	P6KE10CA	8.55	9.50	10.50	1	14.5	41.38	10
P6KE11A	P6KE11CA	9.40	10.50	11.60	1	15.6	38.46	1
P6KE12A	P6KE12CA	10.20	11.40	12.60	1	16.7	35.93	1
P6KE13A	P6KE13CA	11.10	12.40	13.70	1	18.2	32.97	1
P6KE15A	P6KE15CA	12.80	14.30	15.80	1	21.2	28.30	1
P6KE16A	P6KE16CA	13.60	15.20	16.80	1	22.5	26.67	1
P6KE18A	P6KE18CA	15.30	17.10	18.90	1	25.2	23.81	1
P6KE20A	P6KE20CA	17.10	19.00	21.00	1	27.7	21.66	1
P6KE22A	P6KE22CA	18.80	20.90	23.10	1	30.6	19.61	1
P6KE24A	P6KE24CA	20.50	22.80	25.20	1	33.2	18.07	1
P6KE27A	P6KE27CA	23.10	25.70	28.40	1	37.5	16.00	1
P6KE30A	P6KE30CA	25.60	28.50	31.50	1	41.4	14.49	1
P6KE33A	P6KE33CA	28.20	31.40	34.70	1	45.7	13.13	1
P6KE36A	P6KE36CA	30.80	34.20	37.80	1	49.9	12.02	1
P6KE39A	P6KE39CA	33.30	37.10	41.00	1	53.9	11.13	1
P6KE43A	P6KE43CA	36.80	40.90	45.20	1	59.3	10.12	1
P6KE47A	P6KE47CA	40.20	44.70	49.40	1	64.8	9.26	1
P6KE51A	P6KE51CA	43.60	48.5	53.60	1	70.1	8.56	1
P6KE56A	P6KE56CA	47.80	53.20	58.80	1	77.0	7.79	1
P6KE62A	P6KE62CA	53.00	58.90	65.10	1	85.0	7.06	1

Part Number (Uni)	Part Number (Bi)	Reverse Stand off Voltage V_R (V)	Breakdown Voltage $V_{BR} @ I_T$ (V)		Test Current I_T (mA)	Maximum Clamping Voltage $V_C @ I_{PP}$ (V)	Maximum Peak Pulse Current I_{PP} (A)	Maximum Reverse Leakage $I_R @ V_R$ (μ A)
			MIN	MAX				
P6KE68A	P6KE68CA	58.10	64.60	71.40	1	92.0	6.52	1
P6KE75A	P6KE75CA	64.10	71.30	78.80	1	103.0	5.83	1
P6KE82A	P6KE82CA	70.10	77.90	86.10	1	113.0	5.31	1
P6KE91A	P6KE91CA	77.80	86.50	95.50	1	125.0	4.80	1
P6KE100A	P6KE100CA	84.00	95.00	105.00	1	137.0	4.38	1
P6KE110A	P6KE110CA	94.00	105.00	116.00	1	152.0	3.95	1
P6KE120A	P6KE120CA	102.00	114.00	126.00	1	152.0	3.95	1
P6KE130A	P6KE130CA	111.00	124.00	137.00	1	179.0	3.35	1
P6KE150A	P6KE150CA	128.00	143.00	158.00	1	207.0	2.90	1
P6KE160A	P6KE160CA	136.00	152.00	168.00	1	219.0	2.74	1
P6KE170A	P6KE170CA	145.00	162.00	179.00	1	234.0	2.56	1
P6KE180A	P6KE180CA	154.00	171.00	189.00	1	246.0	2.44	1
P6KE200A	P6KE200CA	171.00	190.00	210.00	1	274.0	2.19	1
P6KE220A	P6KE220CA	185.00	209.00	231.00	1	328.0	1.83	1
P6KE250A	P6KE250CA	214.00	237.00	263.00	1	344.0	1.74	1
P6KE300A	P6KE300CA	256.00	285.00	315.00	1	414.0	1.45	1
P6KE350A	P6KE350CA	300.00	332.00	368.00	1	482.0	1.24	1
P6KE400A	P6KE400CA	342.00	380.00	420.00	1	548.0	1.09	1
P6KE440A	P6KE440CA	376.00	418.00	462.00	1	602.0	1.00	1
P6KE480A	P6KE480CA	408.00	456.00	504.00	1	658.0	0.91	1
P6KE510A	P6KE510CA	434.00	485.00	535.00	1	698.0	0.86	1
P6KE530A	P6KE530CA	450.00	503.50	556.50	1	725.0	0.83	1
P6KE540A	P6KE540CA	459.00	513.00	567.00	1	740.0	0.81	1
P6KE550A	P6KE550CA	467.00	522.50	577.50	1	760.0	0.79	1

Notes:

For bidirectional type having V_{RWM} of 20 volts and less, the IR limit is double.

For parts without A, V_{BR} is $\pm 10\%$ and V_C is 5% higher than A parts.

Ratings and Characteristic Curves $T_A=25^\circ\text{C}$ unless otherwise noted

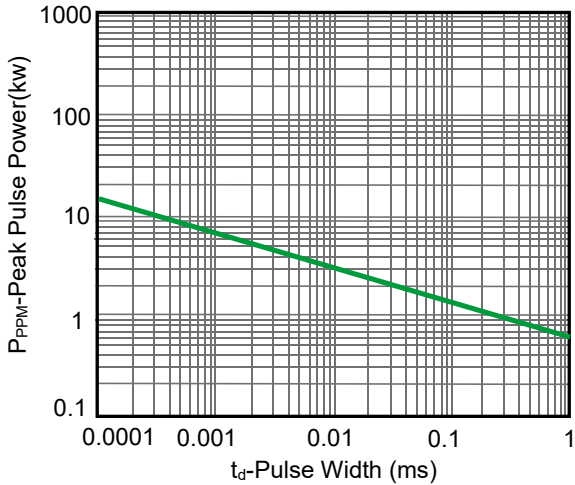


Figure 1 - Peak Pulse Power Rating Curve

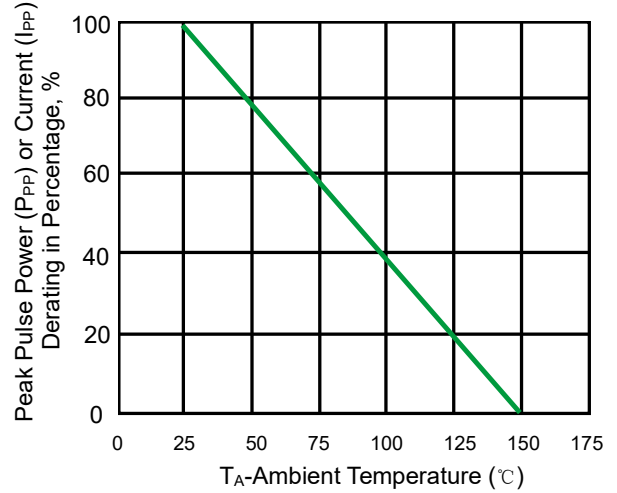


Fig.2-Pulse Derating Curve

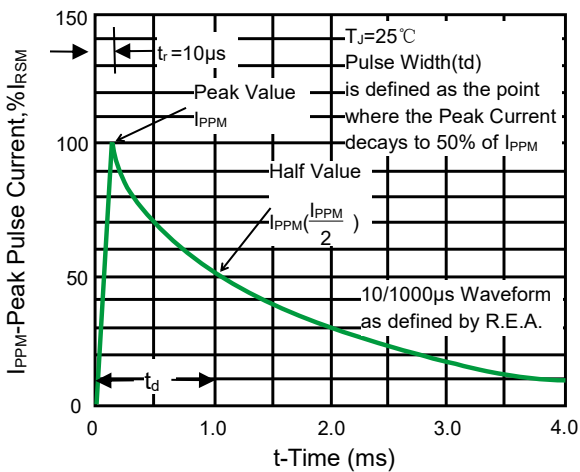


Fig.3-Pulse Waveform

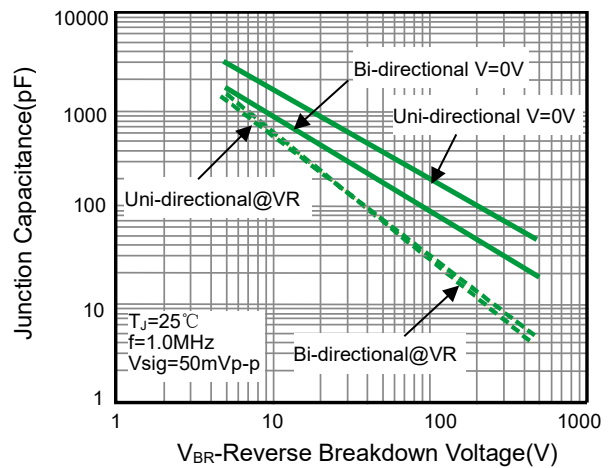


Fig.4-Typical Junction Capacitance

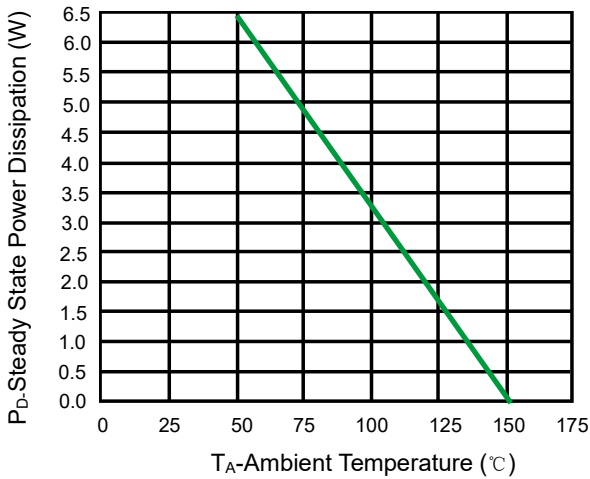


Fig.5- Steady State Power Dissipation Derating Curve


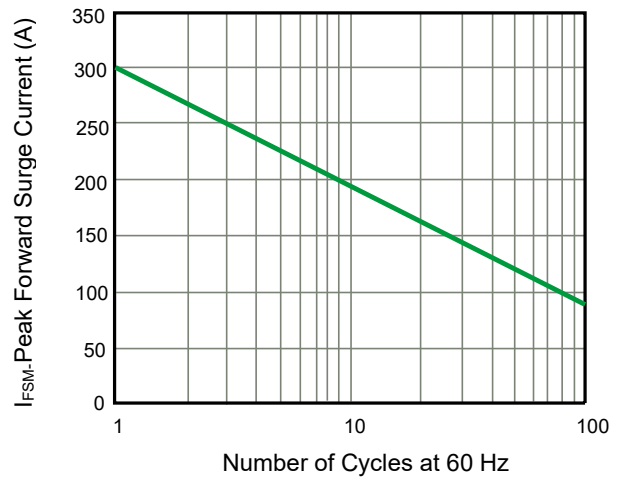



Fig.6-Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

Product dimension (DO-15)

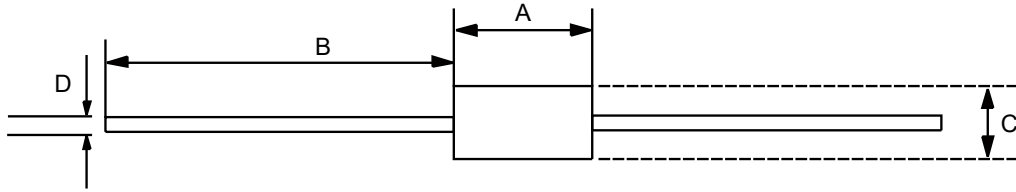

Dim	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.230	0.300	5.80	7.60
B	1.000	--	25.4	--
C	0.104	0.140	2.60	3.60
D	0.026	0.034	0.70	0.90

IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.