


**Feature**

This device is Pb-Free, Halogen Free/BFR Free and RoHS compliant.

- Package: DFN1006-3L
- Emitter -Base Breakdown Voltage 5V
- High DC current gain typical 380
- Low Saturation Voltage 200mV
- 100mA continuous collector current
- PNP switch transistor

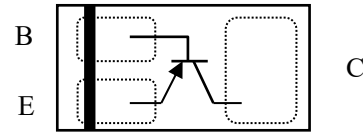

Top View

**Mechanical Characteristics**

- Lead finish:100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature:260°C
- Device meets MSL 1 requirements
- Pure tin plating: 7 ~ 17 um
- Pin flatness : ≤3mil

**Electrical characteristics per line@25°C( unless otherwise specified)**

Parameter		Symbol	Value	Units
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	-40	V
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	-50	V
Emitter -Base Breakdown Voltage		$V_{(BR)EBO}$	-5	V
Collector Current		$I_C$	-100	mA
Peak Collector Current		$I_{CM}$	-200	mA
Peak Base Current		$I_{BM}$	-100	mA
Maximum Power Dissipation (Note 1)(Note 4)	TA=25°C	$P_D$	270	mW
	TA=70°C		170	
Maximum Power Dissipation (Note 2)(Note 4)	TA=25°C	$P_D$	240	
	TA=70°C		150	
Storage Temperature		$T_{stg}$	-65~150	°C
Max. Operating Junction Temperature		$T_j$	150	°C

## Thermal resistance

Parameter	Symbol	Min.	Typ.	Max.	Units
Junction-to-Ambient Thermal Resistance (Note 1)	$R_{\theta JA}$		395	460	°C/W
Junction-to-Ambient Thermal Resistance (Note 2)	$R_{\theta JA}$		450	515	

## Absolute maximum rating@25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Collector-Base Breakdown Voltage	$BV_{CBO}$		-50			V
Collector-Emitter Breakdown Voltage	$BV_{CEO}$		-40			V
Emitter-Base Breakdown Voltage	$BV_{EBO}$		-5			V
Collector Cut-off Current ( $I_E=0$ )	$I_{CBO}$	$V_{CB}=-30V$			-0.1	$\mu A$
Emitter Cut-off Current ( $I_C=0$ )	$I_{EBO}$	$V_{EB}=-4V$			-0.1	$\mu A$
DC Current Gain	$h_{FE}$	$I_C=-1mA, V_{CE}=-6V$	200		500	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-50mA, I_B=-5mA$	-		-200	mV
Transition frequency	$f_T$	$V_{CE}=-12V, I_E=-2mA, f=100MHz$	100			MHz
Output Capacitance	$C_{ob}$	$V_{CB}=-12V, I_E=0mA, f=1MHz$			2.2	pF

## Note:

1. Surface mounted on FR4 Board using 1 square inch pad size, 1oz copper
2. Surface mounted on FR4 board using minimum pad size, 1oz copper
3. Pulse width < 380 $\mu s$ , Single pulse
4. Maximum junction temperature  $T_J=150^\circ C$ .
5. Pulse test: Pulse width < 380 us duty cycle < 2%.

Typical Characteristics

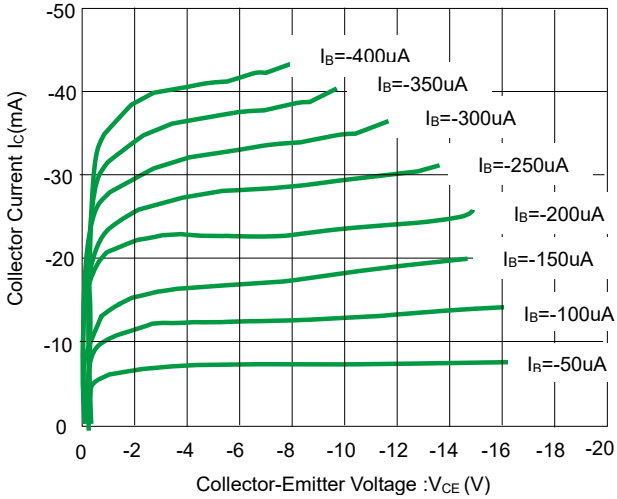


Figure1.Static Characteristic

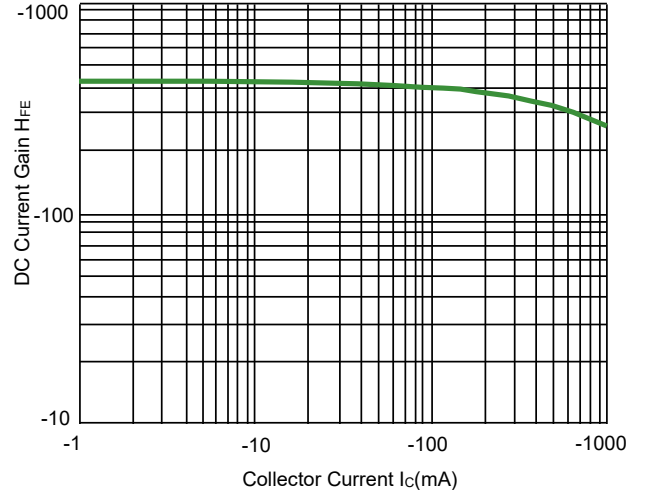


Figure2.DC Current Gain

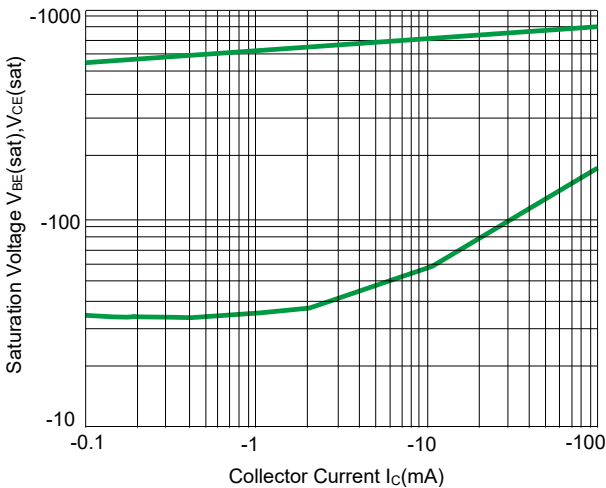


Figure3.Base-Emitter Saturation Voltage

Collector-Emitter Saturation Voltage

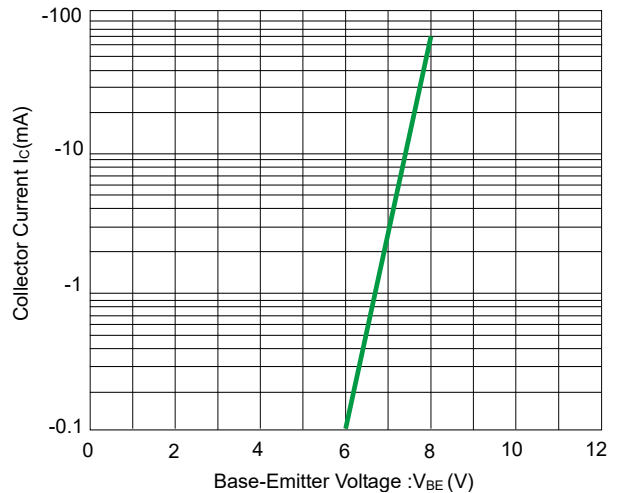


Figure4.Base-Emitter On Voltage

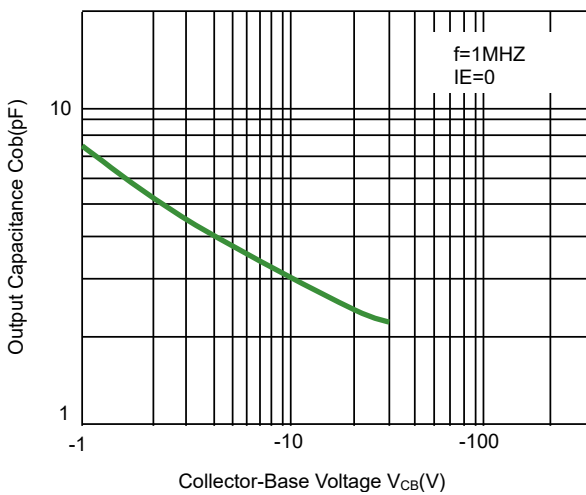


Figure5.Collector Output Capacitance


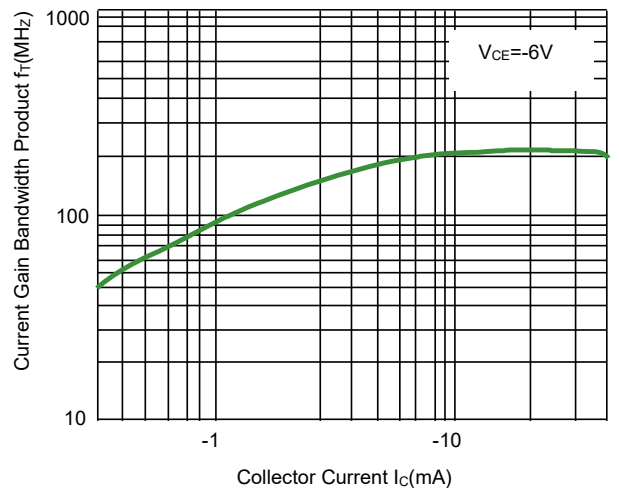



Figure6.Current Gain Bandwidth Product

Solder Reflow Recommendation


Peak Temp=257°C, Ramp Rate=0.802deg. °C/sec

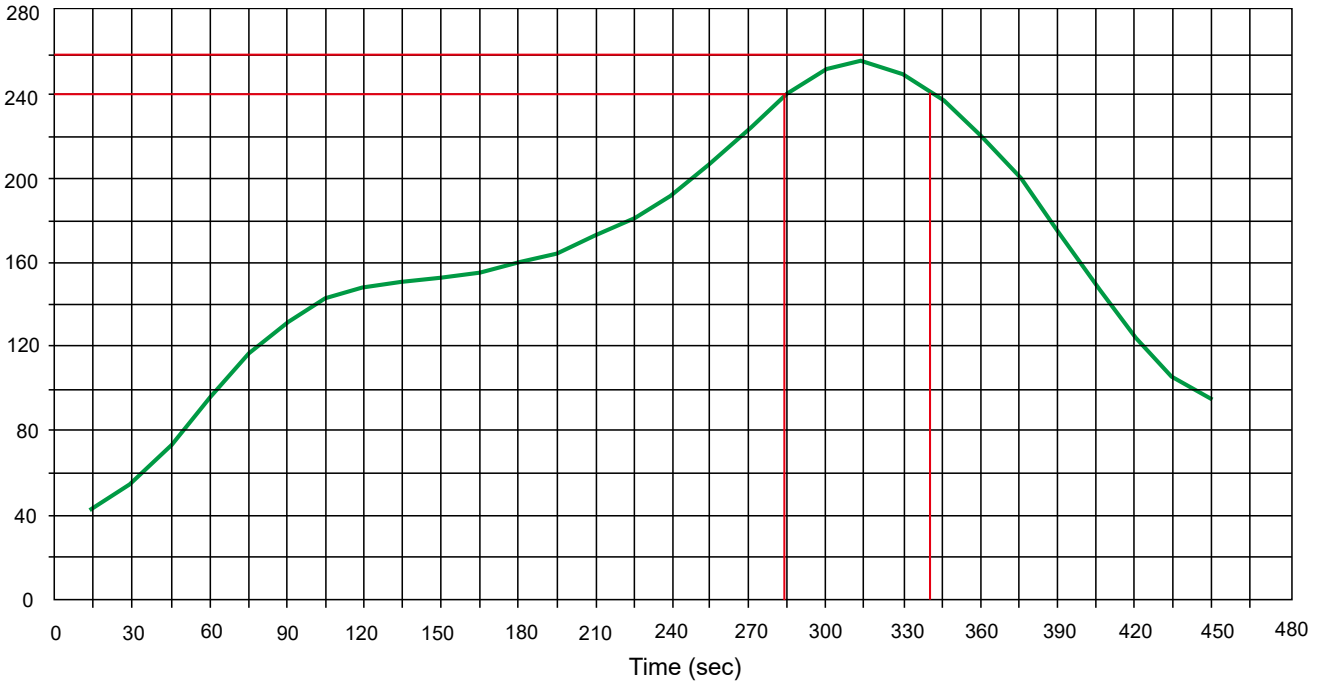

Product dimension (DFN1006-3L)

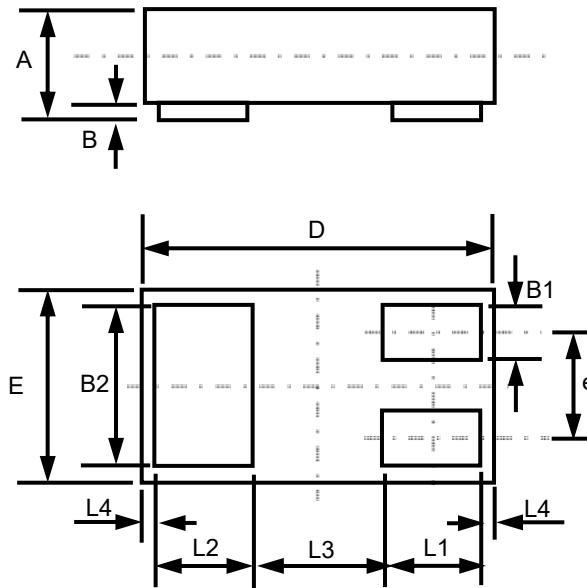


Dim	Millimeters		
	MIN	Typ	MAX
A	0.33	0.47	0.498
B	0.00	0.03	0.05
B1	0.10	0.15	0.20
B2	0.45	0.50	0.55
D	0.85	1.00	1.15
E	0.45	0.60	0.75
e	--	0.35	--
L1	0.20	0.25	0.30
L2	0.20	0.25	0.30
L3	--	0.39	--
L4	--	0.05	--

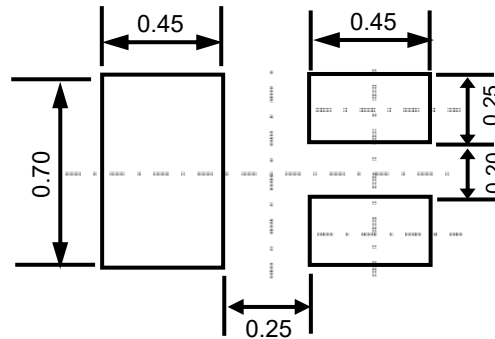

Suggested PCB Layout

Unit:mm


Marking information




Ordering information

Device	Package	Reel	Shipping
PPT3FD503E0-2	DFN1006-3L (Pb-Free)	13"	40000 / Tape & Reel

Load with information

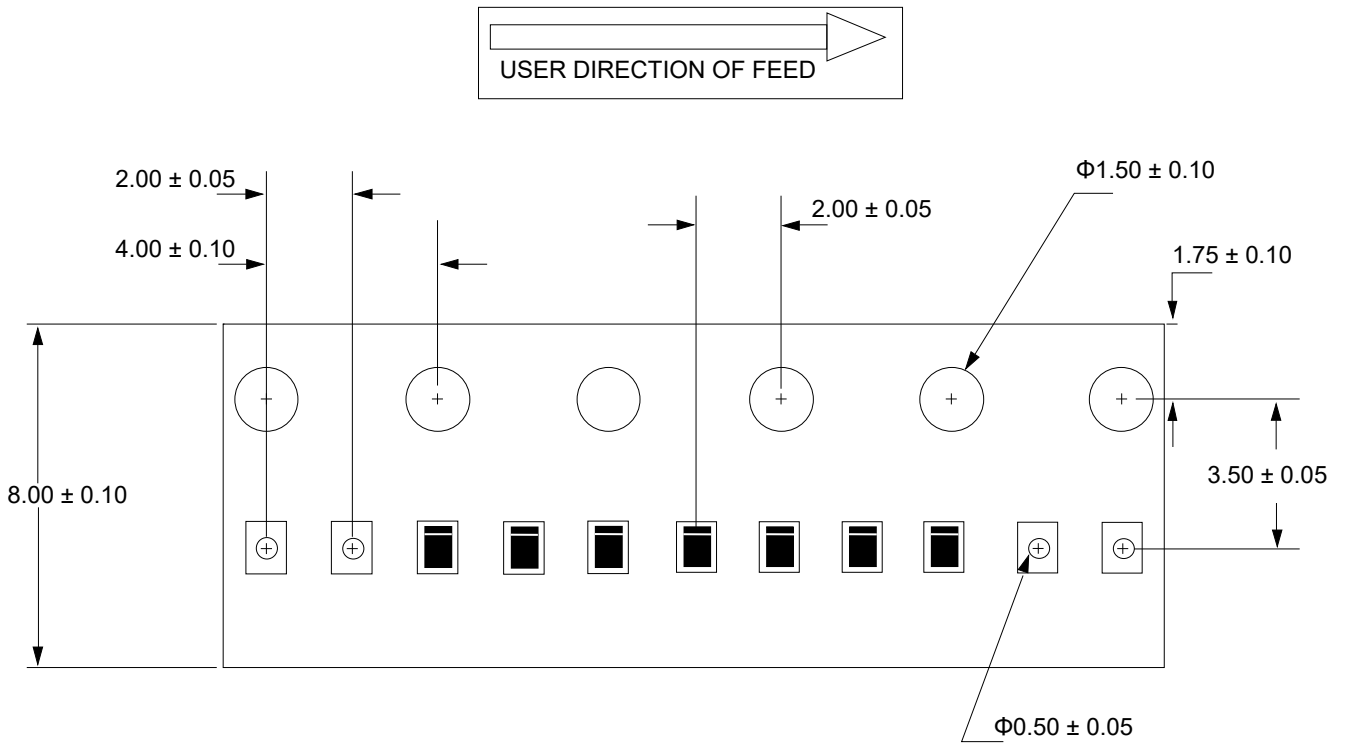


**IMPORTANT NOTICE**

 and **Prisemi**<sup>®</sup> are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**<sup>®</sup> is a registered trademark of Prisemi Electronics.

All rights are reserved.