


Over-voltage Protection Thyristor

Description


Prisemi POVxxxxSC (SMB) protects central office accesses and customer premise equipments against overvoltage on communication line. Such as CCD and DVR video line, modems, line cards, fax machines, and other CPE. The devices are used to enable equipment to meet various regulatory requirements including GR 1089, ITU K.20, K.21 and K.45, IEC 60950, UL 60950, and TIA-968 (formerly known as FCC Part 68).

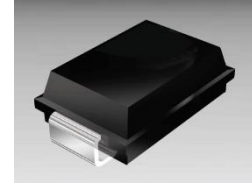

Feature

Compared to surge suppression using other technologies, POV3100SC devices offer absolute surge protection regardless of the surge current available and the rate of applied voltage (dv/dt).

- Cannot be damaged by voltage
- Eliminate hysteresis and heat dissipation typically found with clamping devices
- Eliminate voltage overshoot caused by fast-rising transients
- Are non-degenerative
- Will not fatigue
- Have low capacitance, making them ideal for high-speed transmission equipment

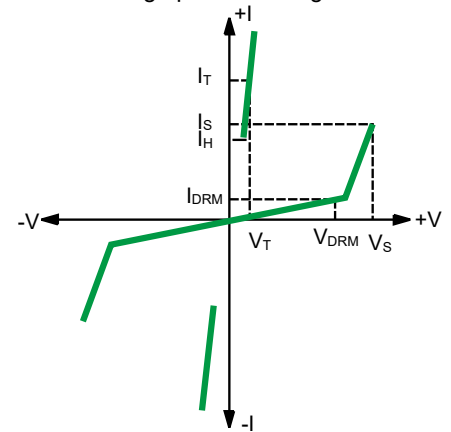

Mechanical Characteristics

- Lead finish: 100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature: 260°C
- Device meets MSL 1 requirements
- Pure tin plating: 7 ~ 17 um
- Pin flatness: ≤ 3mil

Over-voltage Protection Thyristor
Electrical Parameters

Part Number	V _{DRM} (V)	V _S (V)	V _T (V)	I _{DRM} (μA)	I _S (mA)	I _T (A)	I _H (mA)	C (pF)
POV0080SC	6	25	4	5	800	2.2	50	100
POV0300SC	25	40	4	5	800	2.2	50	100
POV0640SC	58	77	4	5	800	2.2	150	100
POV0720SC	65	88	4	5	800	2.2	150	100
POV0900SC	75	98	4	5	800	2.2	150	90
POV1100SC	90	130	4	5	800	2.2	150	90
POV1300SC	120	160	4	5	800	2.2	150	90
POV1500SC	140	180	4	5	800	2.2	150	85
POV1800SC	170	220	4	5	800	2.2	150	85
POV1826SC	180	260	4	5	800	2.2	150	55
POV2300SC	190	260	4	5	800	2.2	150	80
POV2600SC	220	300	4	5	800	2.2	150	80
POV3100SC	275	350	4	5	800	2.2	150	80
POV3500SC	320	400	4	5	800	2.2	150	65
POV4500SC	400	530	4	5	800	2.2	150	65

Notes: ALL measurements are made at an ambient temperature of 25°C. I_{pp} applies to -40°C through +85°C temperature range.

V_{DRM} is measured at I_{DRM}.

V_S is measured at 100V/μs.


Off-state capacitance is measured at 1MHz with a 2V bias.

Surge Ratings

Series	I _{PP} 2x10 μs Amps	I _{PP} 8x20 μs Amps	I _{PP} 10x160 μs Amps	I _{PP} 10x560 μs Amps	I _{PP} 10x1000 μs Amps	I _{TSM} 60 Hz Amps	di/dt Amps/μs
C	500	400	200	150	100	50	500

Over-voltage Protection Thyristor

Thermal Considerations

Package SMB	Symbol	Parameter	Value	Unit
	T _J	Operating Junction Temperature	-40 to +150	°C
	T _S	Storage Temperature Range	-65 to +150	°C
	R _{BJA}	Thermal Resistance: Junction to Ambient	90	°C/W

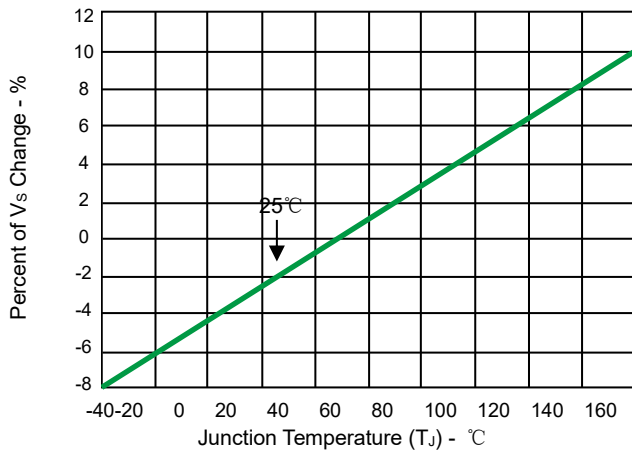


Fig 1. Normalized V_s Change vs. Junction Temperature

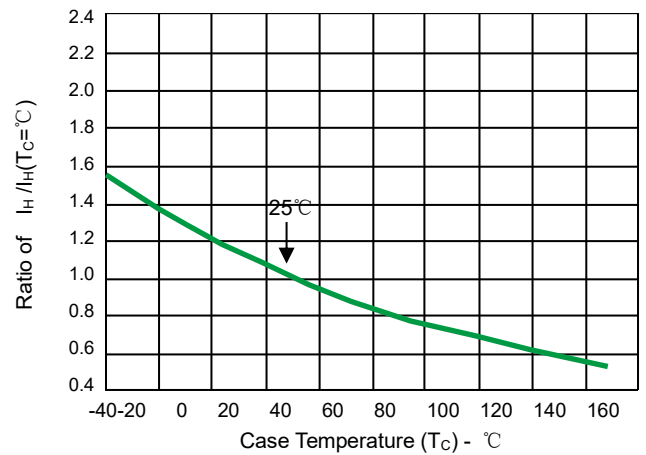


Fig 2. Normalized DC Holding Current versus Case Temperature


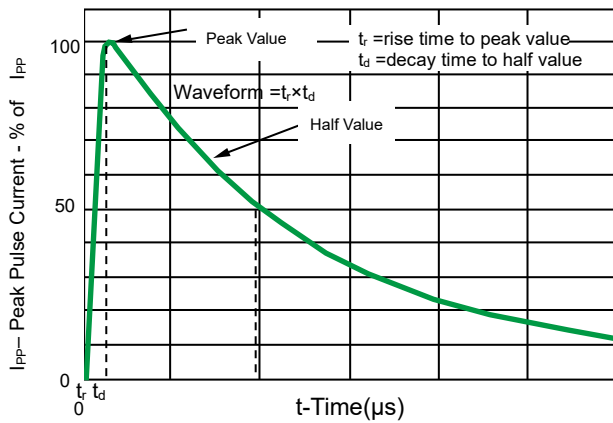


Fig 3. t_r × t_d Pulse Wave-form


Over-voltage Protection Thyristor

Solder Reflow Recommendation

Peak Temp=257°C, Ramp Rate=0.802deg. °C/sec

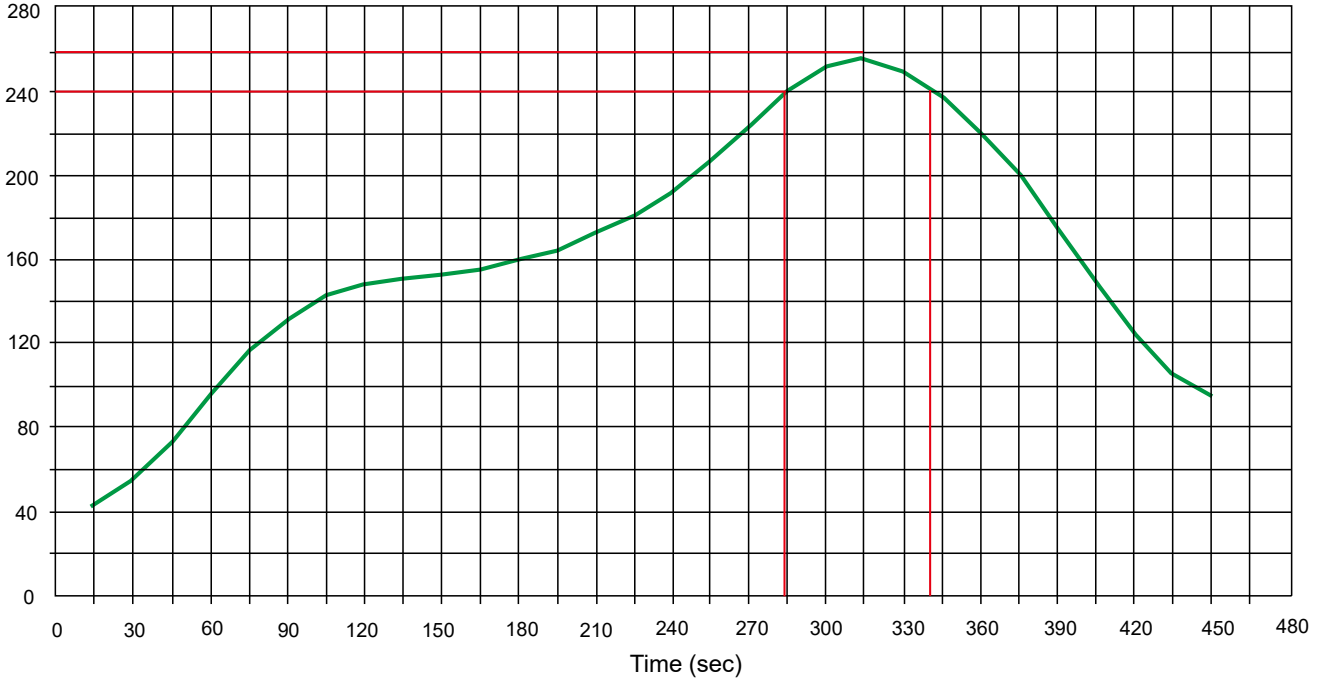

Product dimension(SMB)

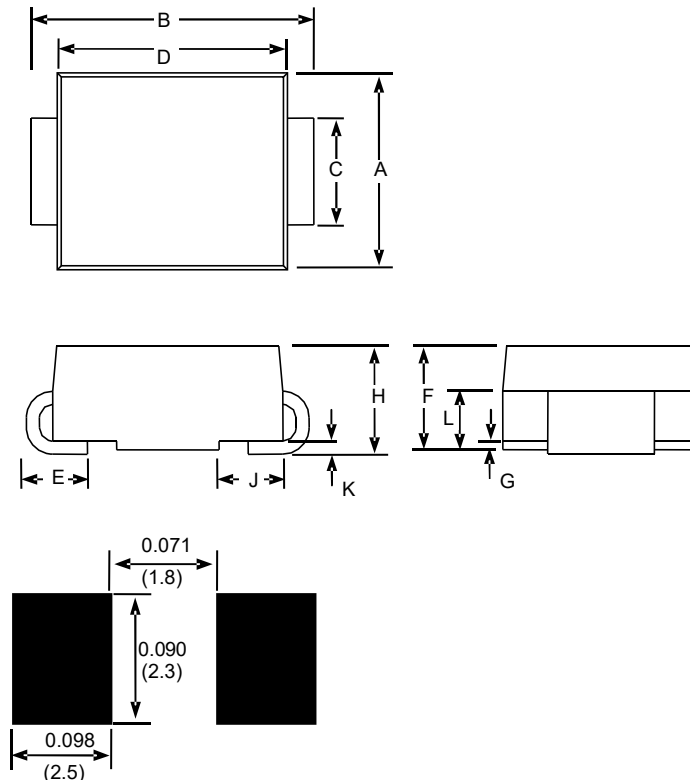

DIMENSIONS ARE :

INCHES
(Millimeters)


Over-voltage Protection Thyristor

Dimension	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.134	0.155	3.40	3.94
B	0.205	0.220	5.21	5.59
C	0.075	0.083	1.90	2.11
D	0.166	0.185	4.22	4.70
E	0.036	0.056	0.91	1.42
F	0.073	0.087	1.85	2.10
G	0.002	0.008	0.05	0.20
H	0.077	0.094	1.95	2.40
J	0.043	0.053	1.09	1.35
K	0.008	0.014	0.20	0.35
L	0.039	0.049	0.99	1.24

Ordering information

Device	Package	Shipping
POV3100SC	SMB (Pb-Free)	3000 / Tape & Reel


IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)**, Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.