


**Description**

The PESDNC3FD10VU is a Transient Voltage Suppressor Arrays that designed to protect components which are connected to data and transmission lines against electrostatic discharge(ESD), electrical fast transients(EFT), and lightning.


All pins are rated to withstand 30kV ESD pulses using the IEC61000-4-2 air discharge method.



**DFN1006-3L(Bottom View)**

**Feature**

- 233W peak pulse power per line ( $t_p = 8/20\mu s$ )
- DFN1006-3L package
- Response time is typically  $< 1\text{ ns}$
- Unidirectional configurations
- Low clamping voltage
- RoHS compliant
- Transient protection for data lines to IEC 61000-4-2(ESD)  $\pm 30\text{kV}$ (air),  $\pm 30\text{kV}$ (contact); IEC 61000-4-5 (Lightning) 11A (8/20us)

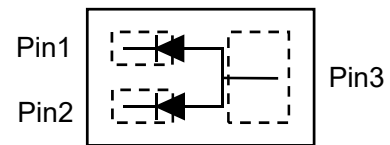

**Circuit Diagram**



**Marking (Top View)**

**Applications**


- Cell phone handsets and accessories
- Personal digital assistants (PDA's)
- Notebooks, desktops, and servers
- Portable instrumentation
- Cordless phones
- Digital cameras
- Peripherals

**Mechanical Characteristics**

- Mounting position: Any
- Qualified max reflow temperature:  $260^{\circ}\text{C}$
- DFN1006-3L without plating

## Electronics Parameter

Symbol	Parameter
$V_{RWM}$	Peak Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$P_{PP}$	Peak Pulse Power
$C_J$	Junction Capacitance
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

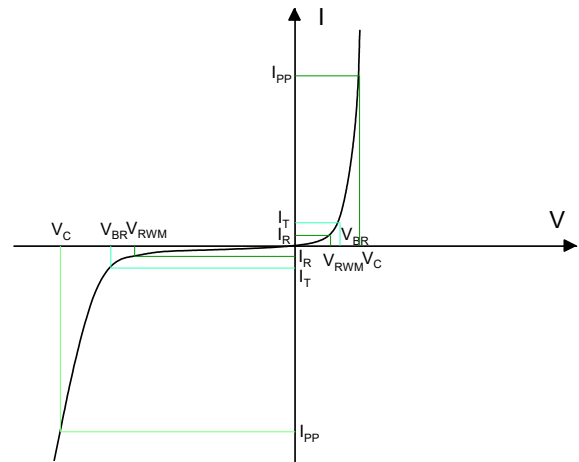

## Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Peak Reverse Working Voltage	$V_{RWM}$	-	-	-	10	V
Breakdown Voltage	$V_{BR}$	$I_t = 1\text{mA}$	11	-	13	V
Reverse Leakage Current	$I_R$	$V_{RWM} = 10\text{V}$	-	-	100	nA
Clamping Voltage <sup>1)</sup>	$V_C$	TLP = 16A, $t_p = 100\text{ns}$	-	16	-	V
Dynamic resistance <sup>1)</sup>	$R_{DYN}$	-	-	0.2	-	$\Omega$
Clamping Voltage <sup>2)</sup>	$V_C$	$I_{PP} = 1\text{A}$ , $t_p = 8/20\mu\text{s}$ , Pin1/Pin2 to Pin3	-	-	14	V
		$I_{PP} = 11\text{A}$ , $t_p = 8/20\mu\text{s}$ , Pin1/Pin2 to Pin3	-	18	20	V
Junction Capacitance	$C_J$	$V_R = 0\text{V}$ , $f = 1\text{MHz}$	-	66	80	pF






Notes:

1. TLP parameter:  $Z_0=50\Omega$ ,  $t_b=100\text{ns}$ ,  $t_r=2\text{ns}$ , averaging window from 70ns to 90ns.  $R_{DYN}$  is calculated from 4A to 16A.
2. Non-repetitive current pulse, according to IEC61000-4-5.


## Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu\text{s}$ )	$P_{PP}$	233	W
Peak Pulse Current ( $t_p = 8/20\mu\text{s}$ )	$I_{PP}$	11	A
Lead Soldering Temperature	$T_L$	260 (10 sec)	$^{\circ}\text{C}$
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~+150	$^{\circ}\text{C}$
ESD Protection-Contact Discharge	$V_{ESD}$	$\pm 30$	kV
ESD Protection-Air Discharge	$V_{ESD}$	$\pm 30$	kV

Typical Characteristics

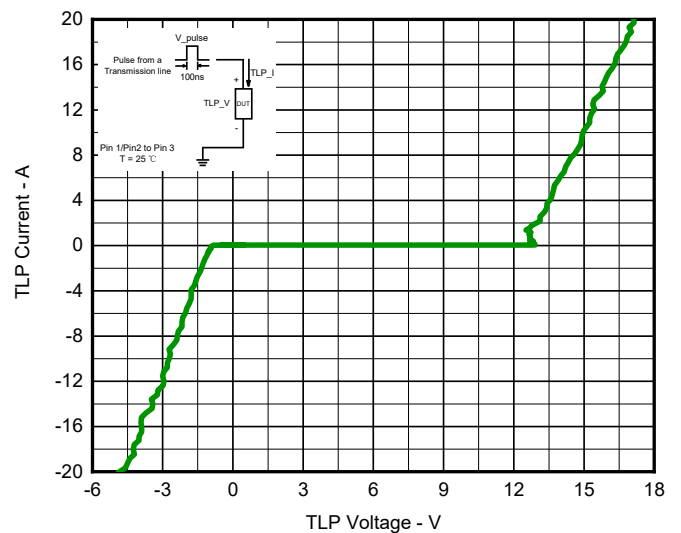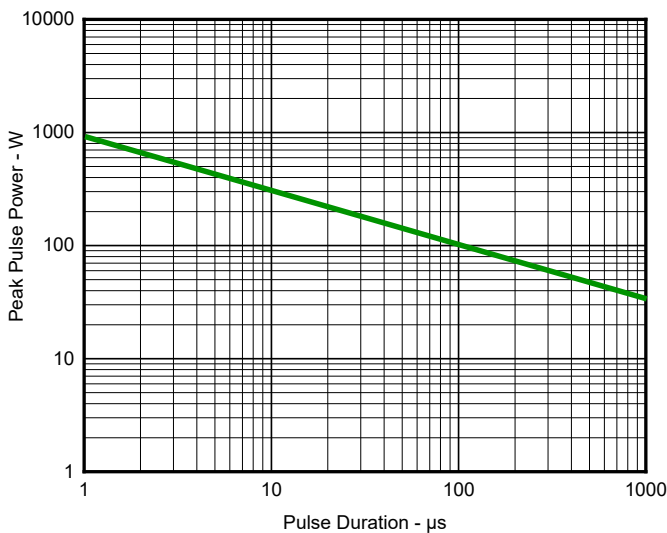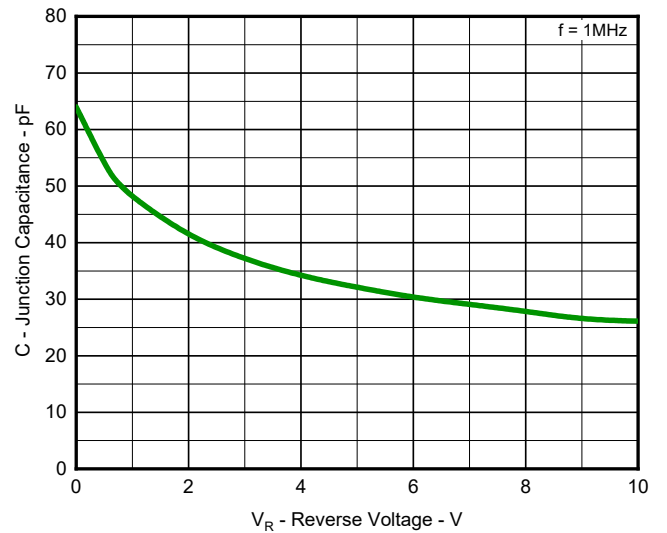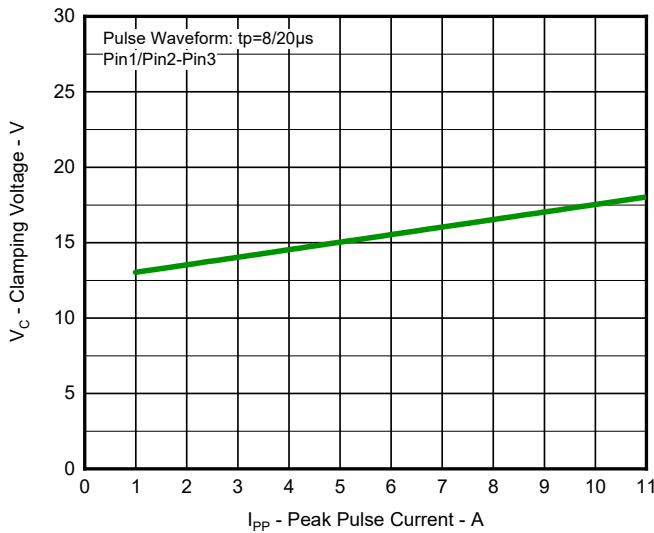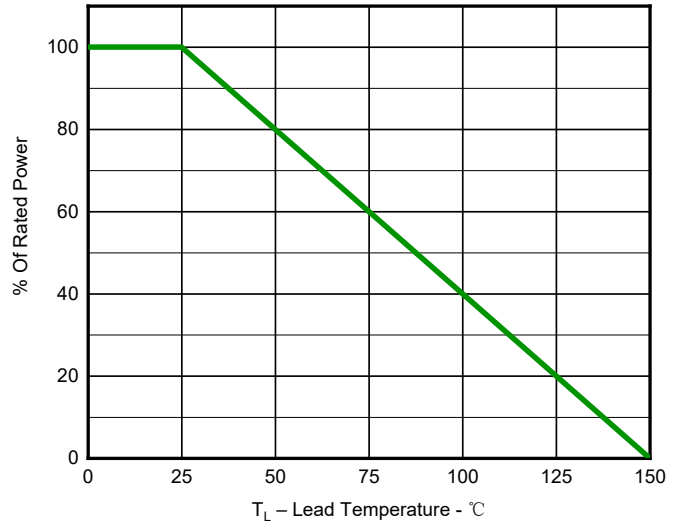

Solder Reflow Recommendation

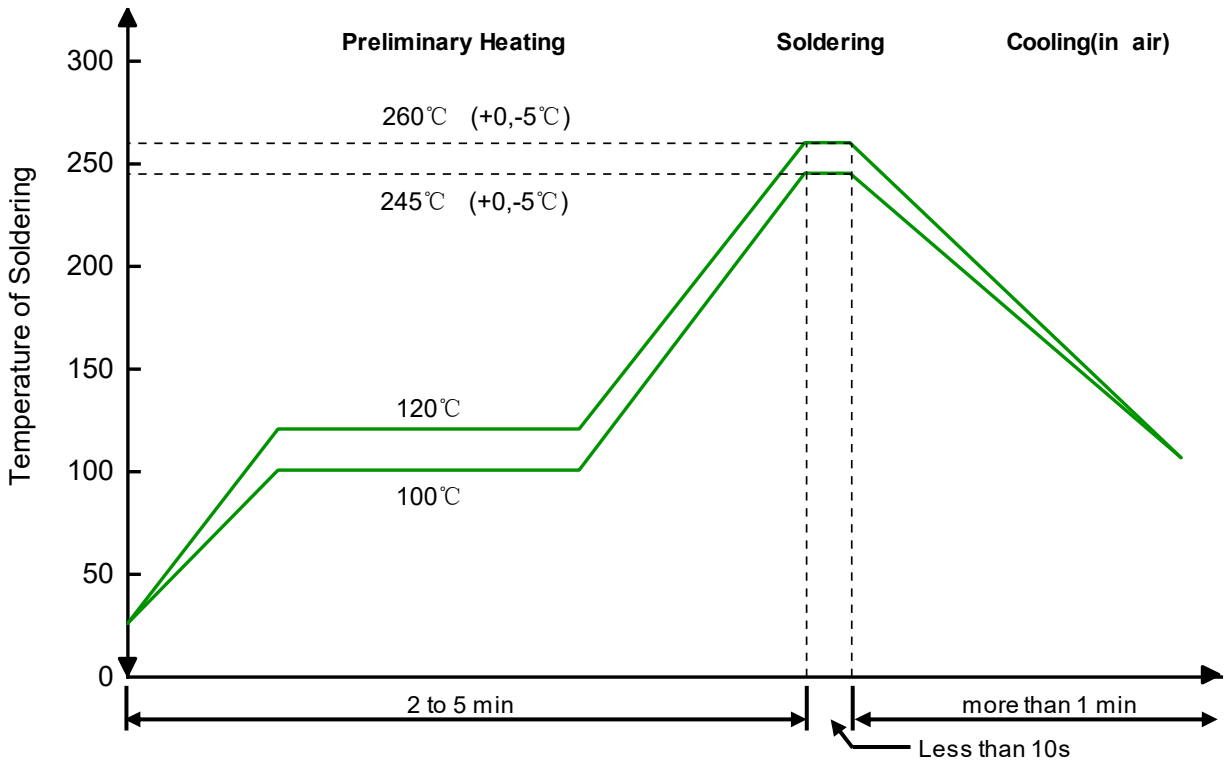

Remark: Pb free for 260°C; Pb for 245°C.

PCB Design


For TVS diodes a low-ohmic and low-inductive path to chassis earth is absolutely mandatory in order to achieve good ESD protection. Novices in the area of ESD protection should take following suggestions to heart:

- Do not use stubs, but place the cathode of the TVS diode directly on the signal trace.
- Do not make false economies and save copper for the ground connection.
- Place via holes to ground as close as possible to the anode of the TVS diode.
- Use as many via holes as possible for the ground connection.
- Keep the length of via holes in mind! The longer the more inductance they will have.

Ordering information


Device	Package	Reel	Shipping
PESDNC3FD10VU	DFN1006-3L	7"	10000 / Tape & Reel

Load with information

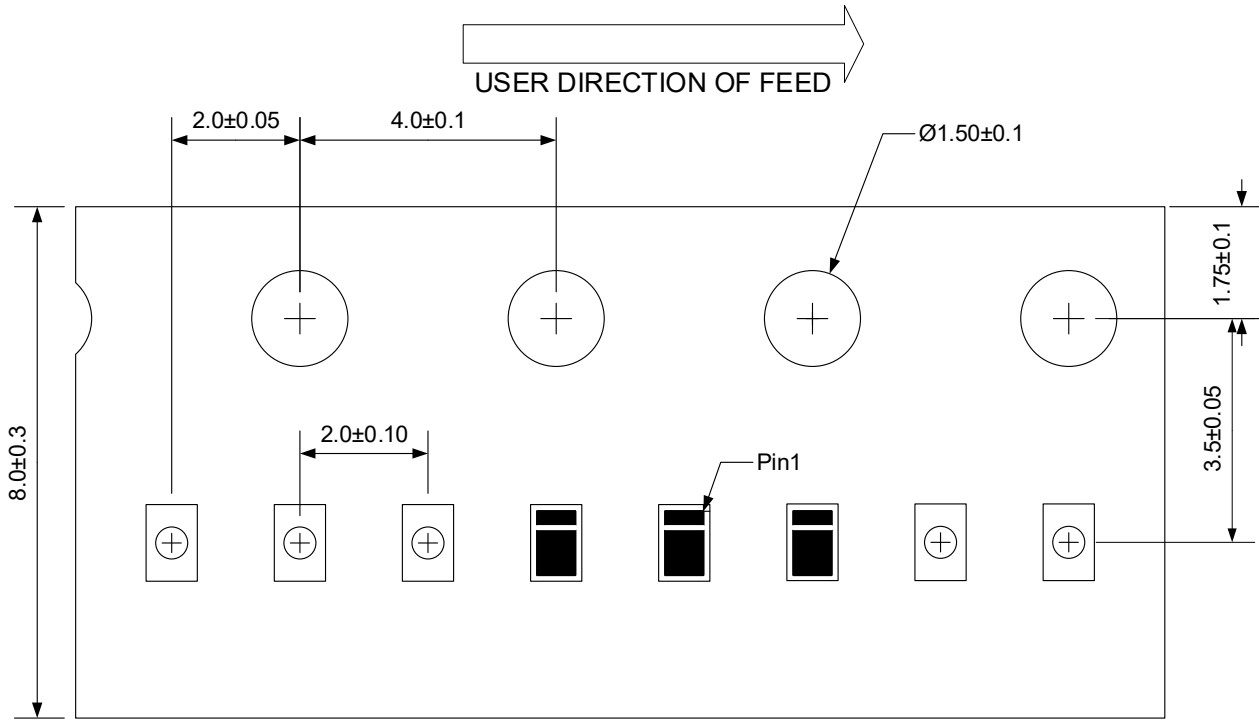


Unit:mm

Product dimension (DFN1006-3L)

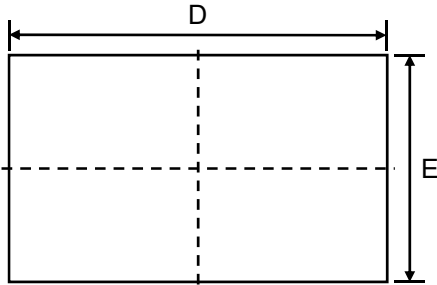


Top View

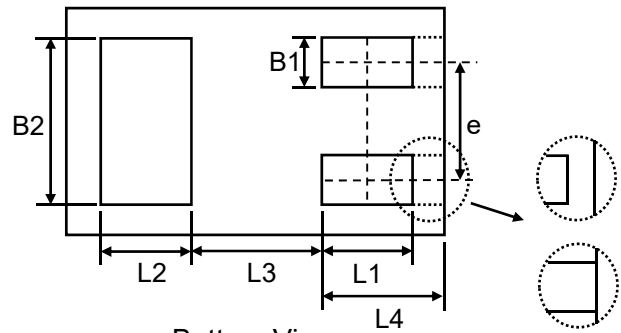

Bottom View



Side View

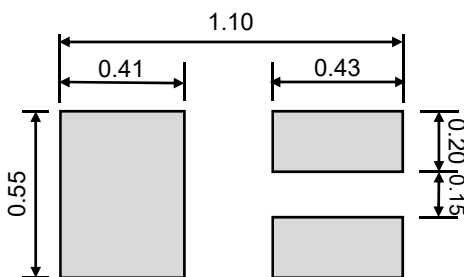


Suggested PCB Layout

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	0.33	0.55	0.013	0.022
B	0.00	0.05	0.000	0.002
B1	0.10	0.20	0.004	0.008
B2	0.45	0.55	0.018	0.022
D	0.90	1.05	0.035	0.041
E	0.50	0.65	0.020	0.026
e	0.35		0.014	
L1	0.20	0.30	0.008	0.012
L2	0.20	0.30	0.008	0.012
L3	0.39		0.015	
L4	0.25	0.35	0.010	0.014

Unit: mm


**IMPORTANT NOTICE**

 and **Prisemi**<sup>®</sup> are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)**, Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**<sup>®</sup> is a registered trademark of Prisemi Electronics.

All rights are reserved.