


Feature

This device is Pb-Free, Halogen Free/BFR Free and RoHS compliant.

- Package: SOT-523
- Emitter -Base Breakdown Voltage 5V
- High DC current gain typical 380
- Low Saturation Voltage 200mV
- 100mA continuous collector current
- PNP switch transistor



Mechanical Characteristics

- Lead finish:100% matte Sn(Tin)
- Mounting position: Any
- Qualified max reflow temperature:260°C
- Device meets MSL 1 requirements
- Pure tin plating: 7 ~ 17 um
- Pin flatness:≤3mil

Electrical characteristics per line@25°C(unless otherwise specified)

Parameter	Symbol	Value	Units
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-40	V
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-50	V
Emitter -Base Breakdown Voltage	$V_{(BR)EBO}$	-5	V
Collector Current	I_C	-100	mA
Peak Collector Current	I_{CM}	-200	mA
Peak Base Current	I_{BM}	-100	mA
Total Dissipation @25°C	P_{tot}	150	mW
Storage Temperature	T_{stg}	-65~150	°C
Max. Operating Junction Temperature	T_j	150	°C
Thermal Characteristics			
Thermal Resistance From Junction to ambient(Note 1)	$R_{th j-a}$	833	K/W

Note


1. Transistor mounted on an FR4 printed-circuit board.

Absolute maximum rating @25°C


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Collector-Base Breakdown Voltage	BV_{CBO}				-50	V
Collector-Emitter Breakdown Voltage	BV_{CEO}				-40	V
Emitter-Base Breakdown Voltage	BV_{EBO}				-5	V
Collector Cut-off Current ($I_E=0$)	I_{CBO}	$V_{CB}=-30V$			-0.1	μA
Emitter Cut-off Current ($I_C=0$)	I_{EBO}	$V_{EB}=-4V$			-0.1	μA
DC Current Gain	h_{FE}	$I_C=-1mA, V_{CE}=-6V$	200		500	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-50mA, I_B=-5mA$	-		-200	mV
Transition frequency	f_T	$V_{CE}=-12V, I_E=-2mA, f=100MHz$	100			MHz
Output Capacitance	C_{ob}	$V_{CB}=-12V, I_E=0mA, f=1MHz$			2.2	pF

Solder Reflow Recommendation


Peak Temp=257°C, Ramp Rate=0.802deg. °C/sec

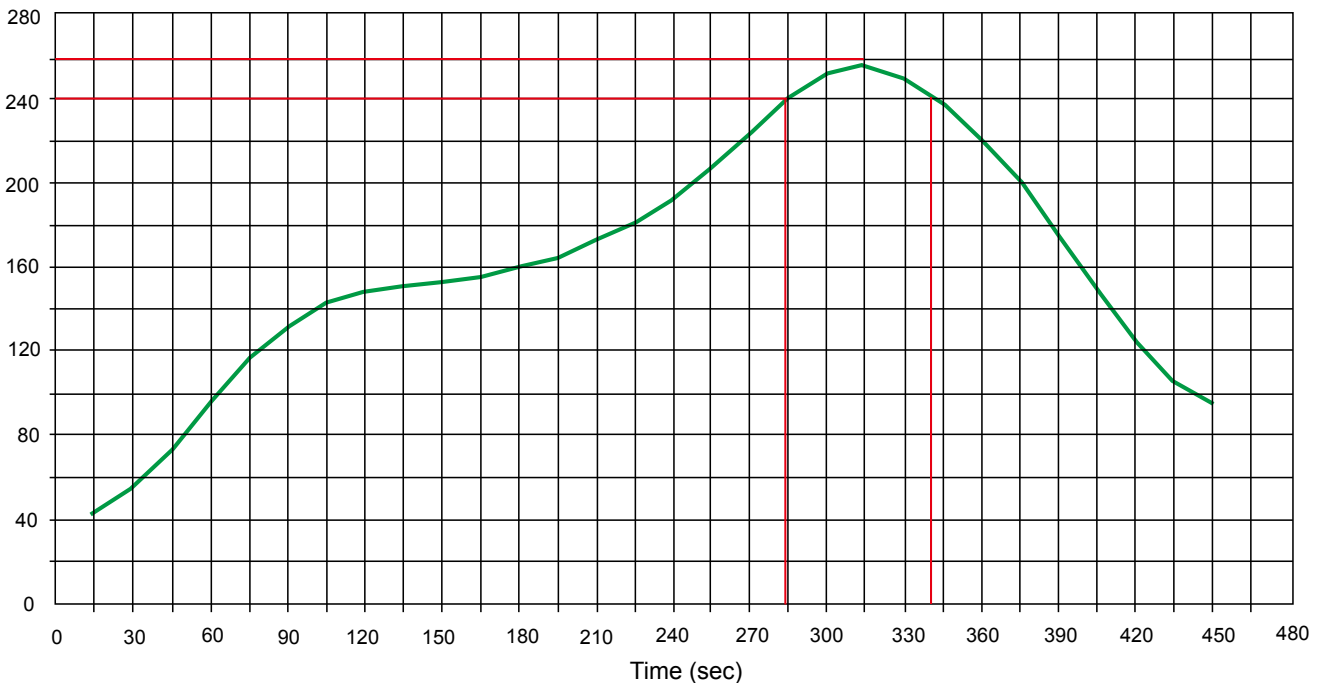

Product dimension (SOT-523)

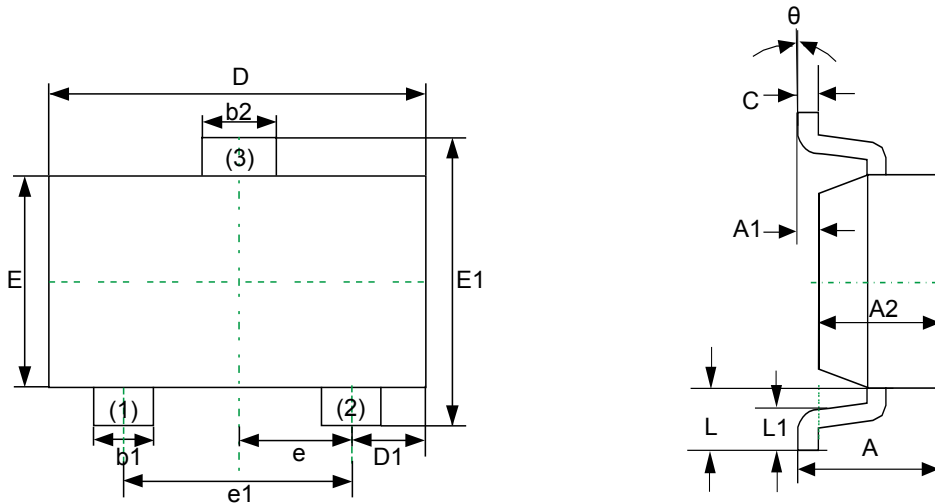

Dim	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
D1	0.300	0.500	0.012	0.020
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500TYP		0.020TYP	
e1	0.900	1.100	0.035	0.043
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

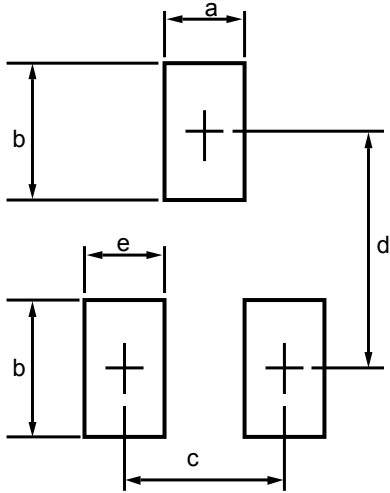


Dim	Millimeters	
	MIN	MAX
a	--	0.5
b	--	0.6
c	--	1.0
d	--	1.24
e	--	0.4

Ordering information

Device	Package	Shipping
PPT523T503E0-2	SOT-523 (Pb-Free)	3000 / Tape & Reel


IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.